

Antenna Datasheet

GSM Rubber Antenna

Model:

BWGSMJWX105-7KJ

Description:

GSM Rubber Antenna with SMA Male Jack

Features:

800-2200MHz Frequency Range

SMA Male Jack (Inner Thread, Inner Pin) Connector

Structure: Foldable

360° Omnidirectional Radiation

Dimensions: 105mm x 7mm

Compliant with RoHS & REACH Regulations

Contents

| | | |
|-----|-----------------------------|-------|
| 1. | Description | 3 |
| 2. | Specifications | 4 |
| 3. | Product Picture | 5 |
| 4. | Mechanical Drawing | 6 |
| 5. | Testing Equipment | 7-8 |
| 6. | Performance Data | 9-10 |
| 6.1 | V.S.W.R | 9 |
| 6.2 | Return Loss | 9 |
| 6.3 | Gain | 10 |
| 6.4 | Efficiency | 10 |
| 6.5 | Antenna Gain and Efficiency | 10 |
| 7. | Radiation Patterns | 11-12 |
| 7.1 | 2D Radiation Patterns | 11 |
| 7.2 | 3D Radiation Patterns | 12 |

BWGSMJWX105-7KJ

Part Number Explanation

| | | |
|-------|------------|----------------|
| BW | Company | Bat Wireless |
| GSM | Frequency | 800-2200Mhz |
| J | Name | Rubber Antenna |
| W | Type | Enternal |
| X | Constant | X |
| 105-7 | Dimensions | 105-7mm |
| K | Feature | Foldable |
| J | Connector | SMA Male Jack |

Selection Table

| | | | | | | | |
|--------------|--------|--------|--------|--------|--------|-------|--------------|
| Connector | IPEX-1 | IPEX-2 | IPEX-3 | IPEX-4 | IPEX-5 | SMA | Customizable |
| Cable Length | 100 | 150 | 200 | 250 | 300 | 500 | Customizable |
| Cable Type | RG0.81 | RG1.13 | RG1.37 | RG174 | RG178 | RG316 | Customizable |

1. Description

Bat Wireless **BWGSMJWX105-7KJ** is a high-performance omnidirectional antenna with excellent penetration capability, ultra-long communication distance, strong environmental adaptability, small size and light weight. It adopts a high-quality plastic shell, with a non-foldable Straight head, and has excellent signal receiving and transmitting capabilities, providing stable and reliable support for device connection. Its compact and lightweight rubber rod design makes it easy to install, transport and carry.

Classic Application Scenarios:

Railway small base stations: Base stations along the railway tracks, covering specific sections.

Train on-board communication: Installed on on-board communication equipment to realize mobile communication.

Handheld terminal devices: Used during inspection, maintenance and other operations.

Bat Wireless provides customized services to optimize your equipment. We have a mature R&D team that can respond quickly to meet your needs. If you have any requirements, please contact our sales and FAE.



2. Specification

| Parameters | Typ. | Unites | Notes |
|--------------------------------------|---------------------------|--------------------|-------|
| Electrical Characteristics | | | |
| Antenna Type | Rubber Antenna | | |
| Frequency Range | 800-2200 | MHz | |
| Input Impedence | 50 | Ω | |
| V.S.W.R | <3 | | |
| Gain | 1.8 | dBi | |
| Polarization Type | Vertical | | |
| Power Capacity | 50 | W | |
| Lightning Protection | - | | |
| DC Voltage | - | V | |
| Radiator | - | | |
| Mechanical Characteristics | | | |
| Dimensions | 105 x 7 | mm | |
| Connector Type | SMA-J Male (Customizable) | | |
| Cable Type | - | | |
| Cable Length | - | mm | |
| Mount way | Screw-on | | |
| Color | Black | | |
| Meterial | ABS | | |
| Weight | 10.28 | g | |
| Environmental Characteristics | | | |
| Waterproof Rating | - | | |
| ROHS Compliant | Compliant | | |
| Operating Temperature | -45~ +85 | $^{\circ}\text{C}$ | |
| Storage Temperature | -45~ +85 | $^{\circ}\text{C}$ | |


3. Product Picture



4. Mechanical Drawing

PARTS DRAWING ROHS Compliant

| REV | PRODUCT NO. | DATE | NAME | DESCRIPTION |
|-----|-------------|------|------|-------------|
| | | | | |

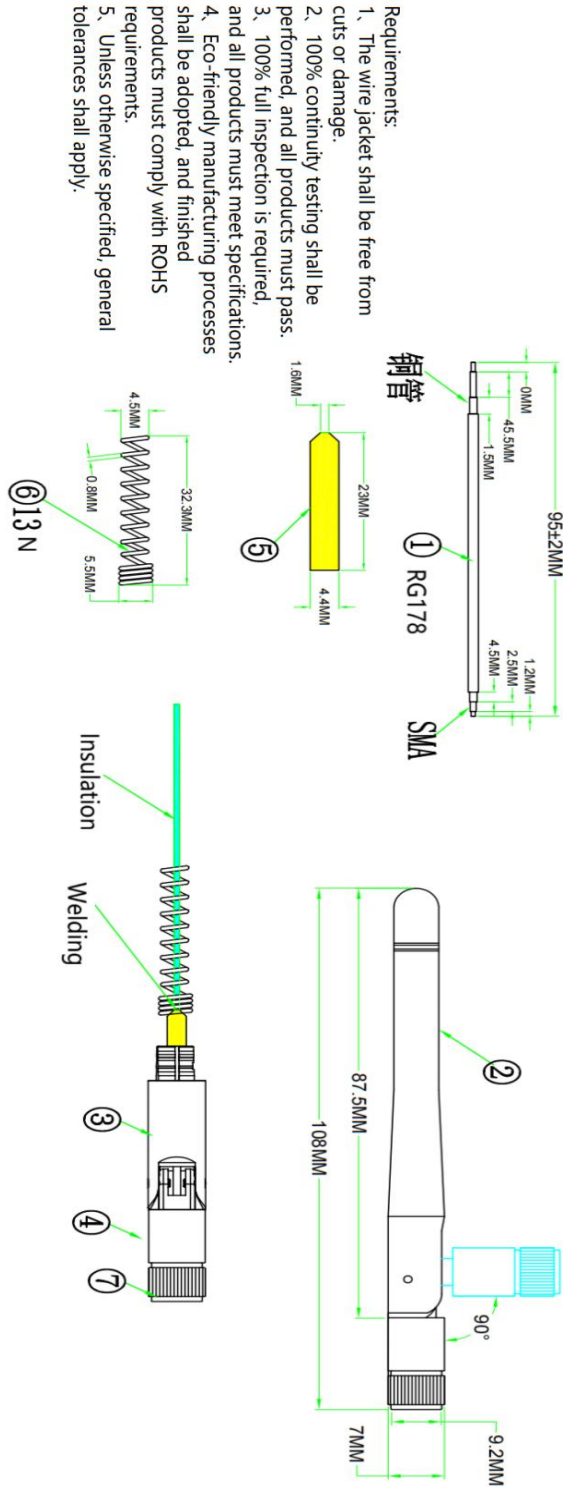

| NO | Code | Name | Description | Qty |
|----|------|--------------|--|-----|
| 7 | | SMA | Male Black | 1 |
| 6 | | Spring | 32.3*4.5*5.5MM Brass 13N | 1 |
| 5 | | Copper Tube | 23*44*16MM Brass | 1 |
| 4 | | Down Base | 12*9.3MM Black | 1 |
| 3 | | Up Base | 20*9.3MM Black | 1 |
| 2 | | Rubber Shell | 67.4*9.3MM Black | 1 |
| 1 | | Wire | RG178 Double-Sn Plated Wire Brown L=95MM | 1 |

| | |
|------------------------|-------------|
| Frequency | 800-2200MHz |
| Gain | 3DBi |
| VSWR | <1.8 |
| Polarization | Vertical |
| Impedance | 50Ω |
| Operating Temperature: | -45°C~85°C |
| Storage Temperature: | -45°C~85°C |

| | |
|-------------------|--|
| ANGLE PROJECTION | |
| GENERAL TOLERANCE | 100-200 : ± 3.00 50-100 : ± 2.00 25-50 : ± 0.20 10-25 : ± 0.15 1-10 : ± 0.10 |

| | | | |
|-------------------------------------|--------|--------|-----|
| PRODUCT NAME | | | |
| Rubber Antenna-GSM-SMA Male-L=108MM | | | |
| UNIT | MM | SIZE | 1:3 |
| PAGE | 1 of 1 | FORMAT | A4 |

5. Test Equipment




Keysight/E5071C Network Analyzer



R&S/CMW500 Comprehensive Tester



R&S/SMBV100B Signal Generator

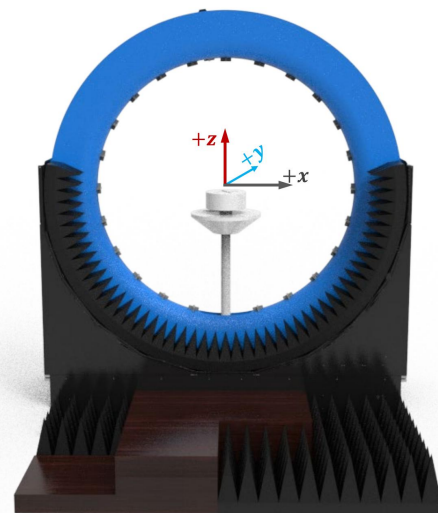

DT-3500 Datasheet

Specification:

| Specification: | Description |
|-------------------|-----------------------|
| Test Frequency | 400MHz-8.5GHz |
| System Size | L*W*H=4*3.5*3.5m |
| Number of Probes | 23 (Probe) + 1 (link) |
| Interval Angle | 15° |
| Sampling Diameter | 2200mm |
| Carring Capacity | ≤40kg |

Testing Capability

Description

Active measurement

Capability : TRP、TIS、EIRP、EIS,. etc
Mode : 2G/3G/4G/5G、Wi-Fi b/g/n/a/ac/ax、BT、NB-IOT、Cat-M (eMTC)、GPS/BEIDOU/GLONASS、ZigBee、LoRa(Non-Signaling),.etc

Passive measurement

Test category : Gain、Efficiency、2D pattern、3D pattern、Pattern roundness、Axial Ratio、ECC,Phase center,. etc
Polarization : Circular polarization, linear polarization, elliptical polarization



RF Link diaram of multi probe spherical near-field testing system

RF Link Overview



RF Link of Passive measurement



RF Link Overview




RF Link of Passive measurement




6. Performance Data

6.1 VSWR

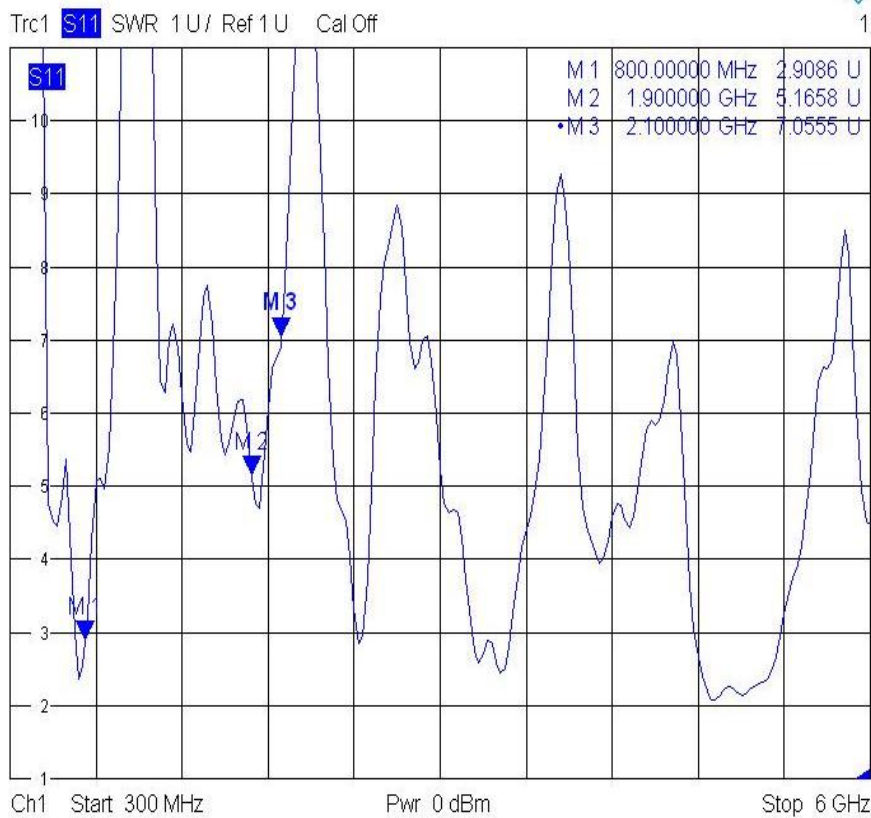


6.2 Return Loss

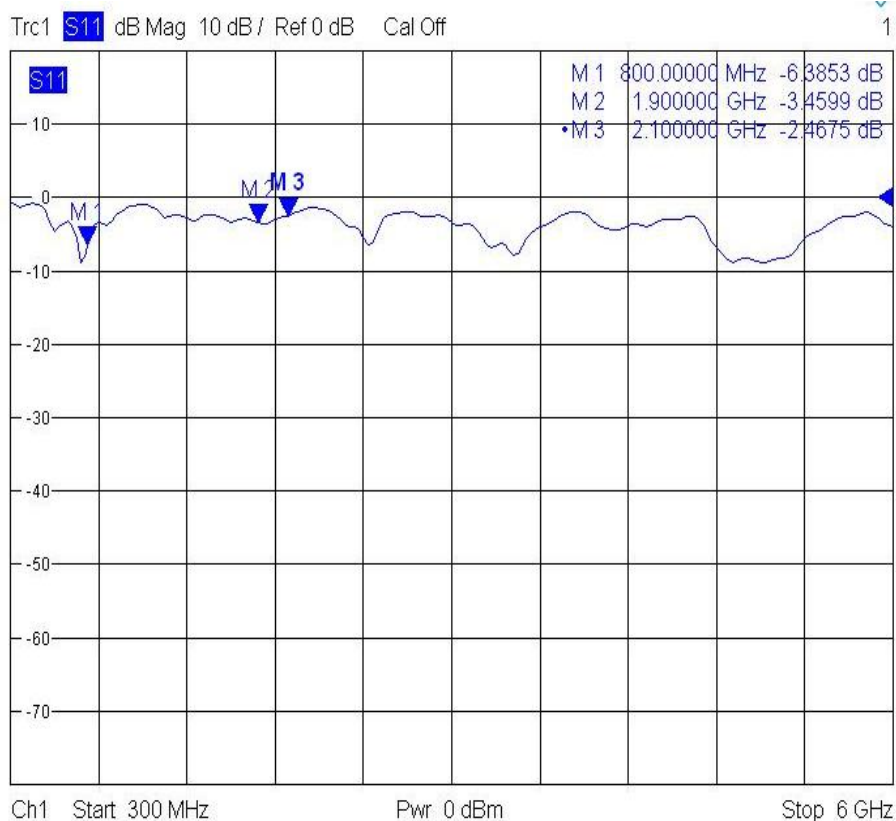


6. Performance Data

6.3 Gain

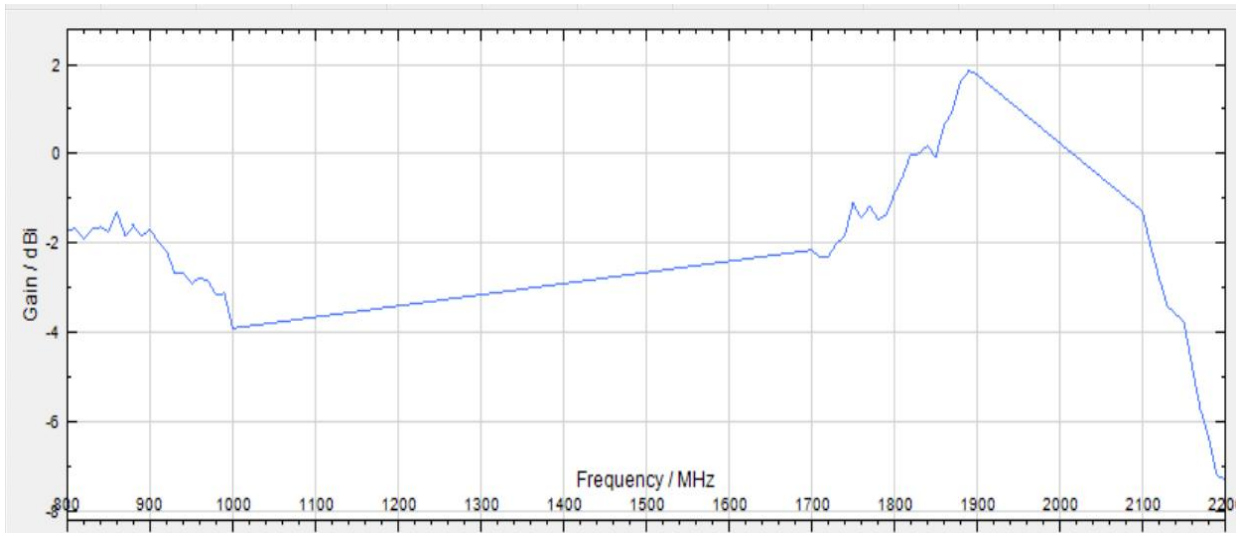

6.4 Efficiency

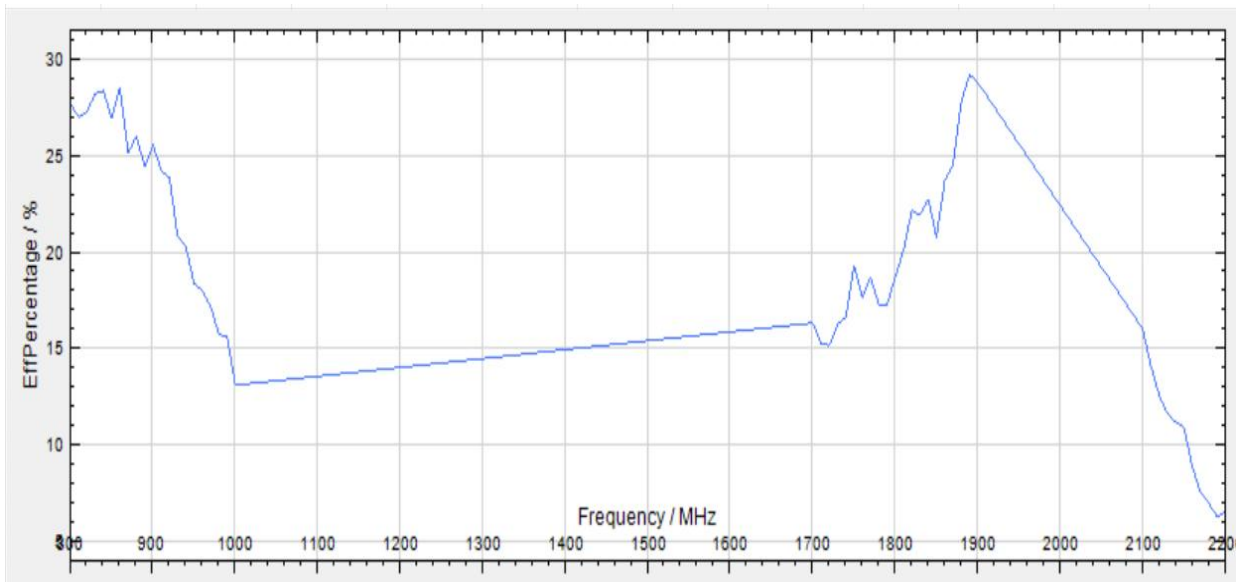


6.5 Gain and Efficiency

| Frequency (MHz) | 820-960 | 1700-2100 | 2100-2200 |
|-----------------|---------|-----------|-----------|
| Gain (dBi) | -1.88 | -1.79 | -1.27 |
| Efficiency (%) | 27.29 | 28.84 | 16.07 |



7. Radiation Patterns

7.1 2 D Radiation Patterns


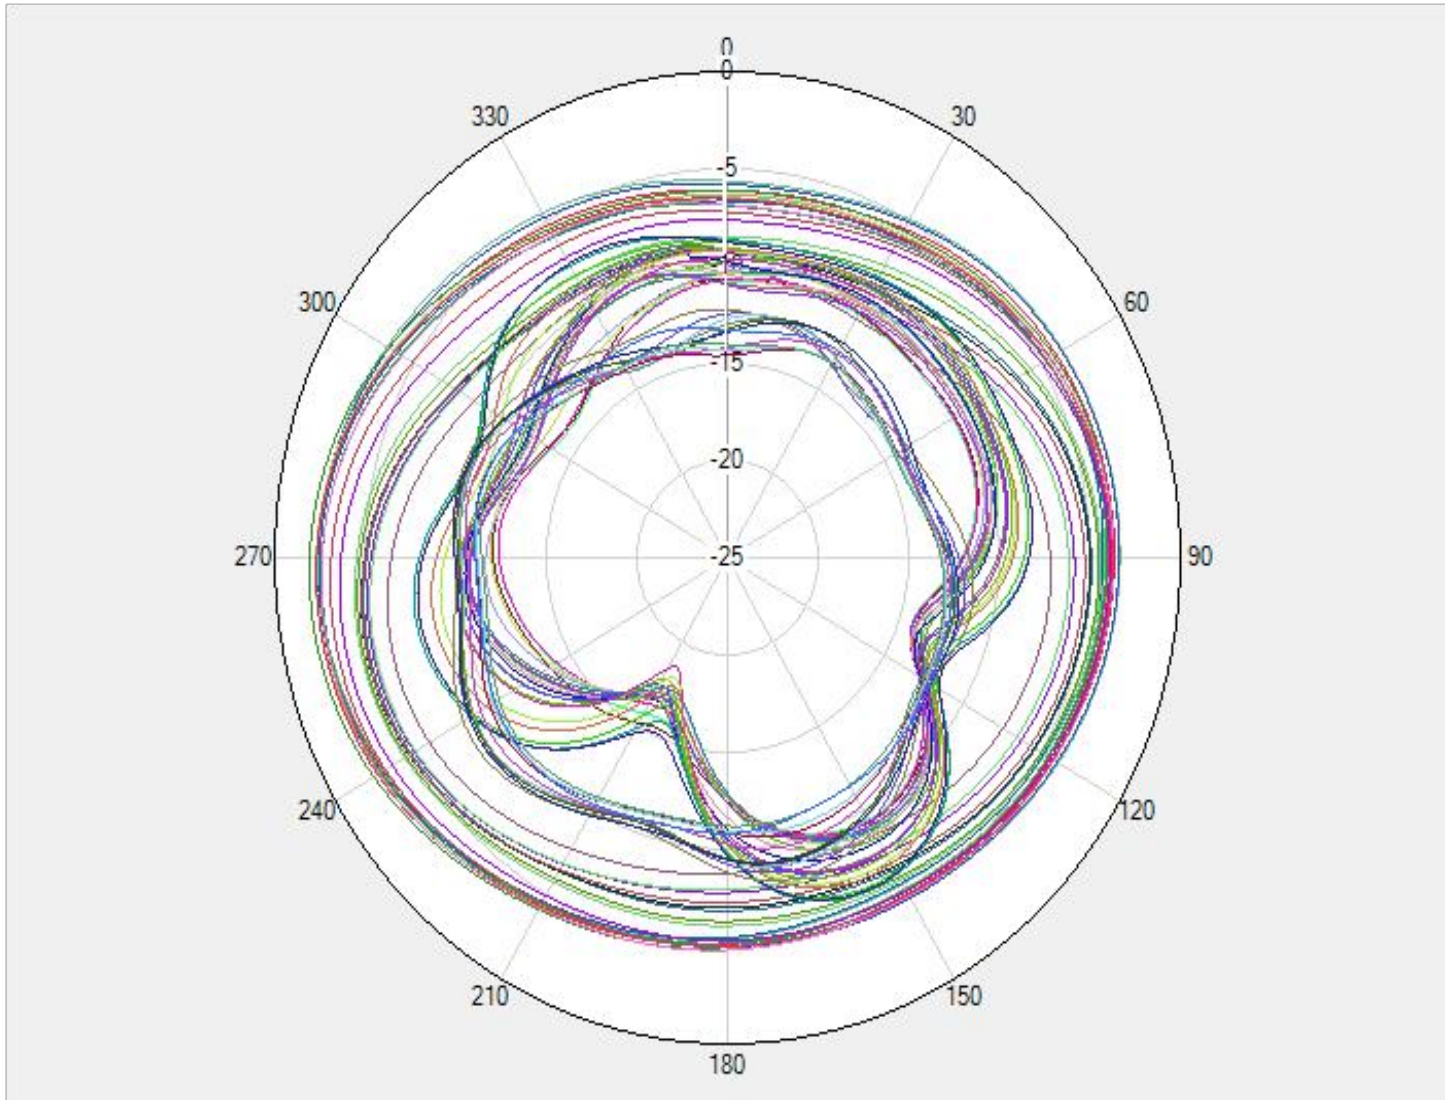




7.2 3D Radiation Patterns—800MHz、1900Mhz

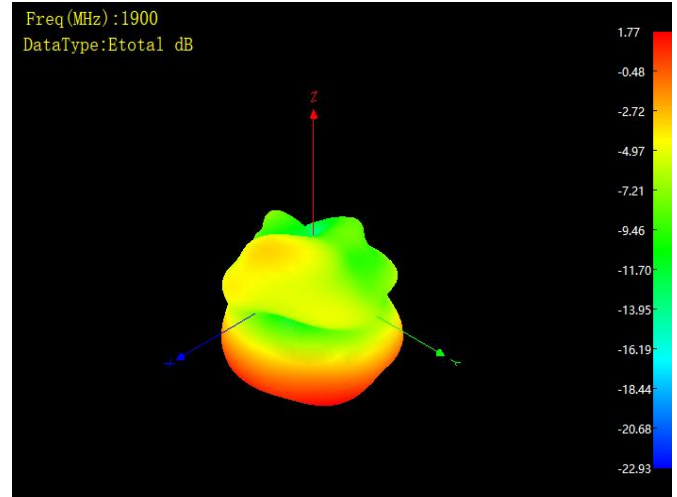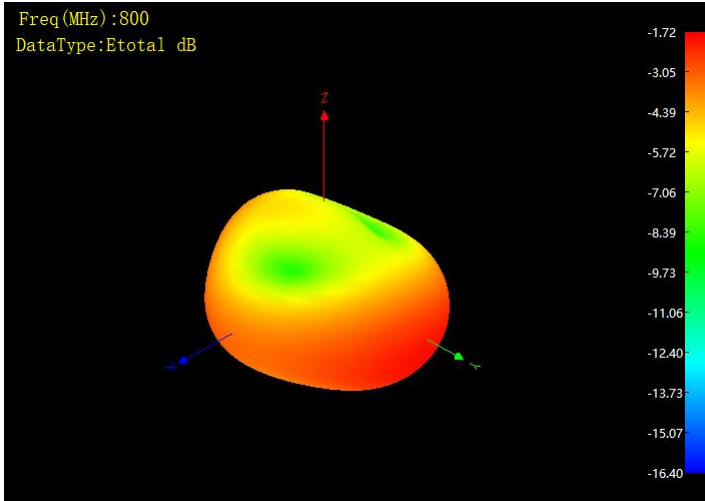

7.2 3D Radiation Patterns—2100MHz、2200Mhz

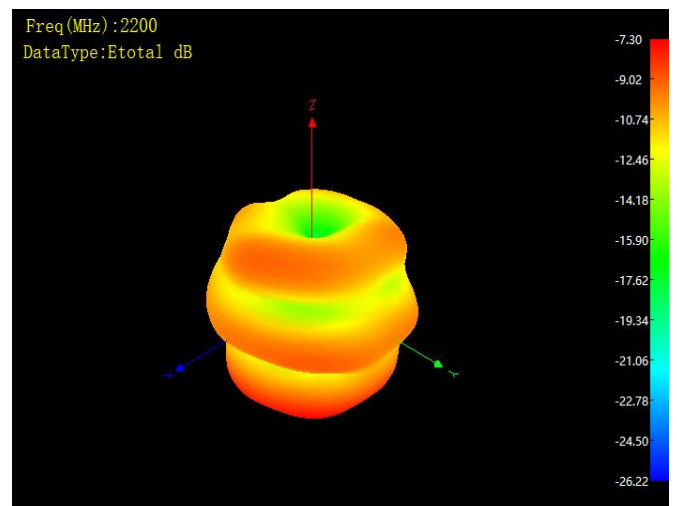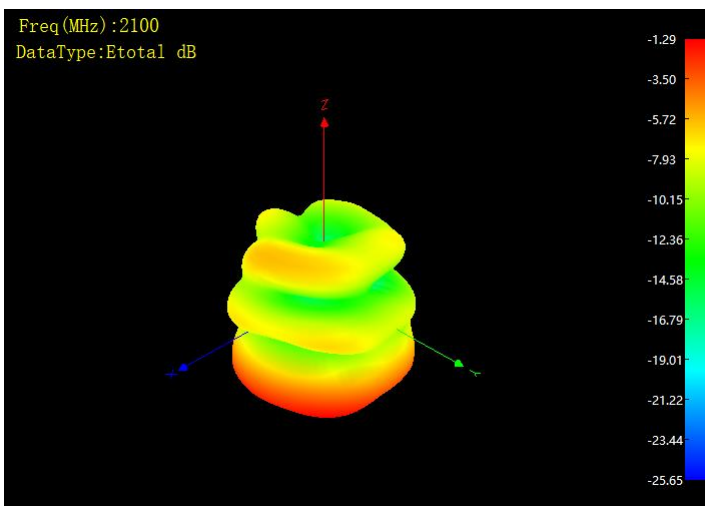



DECLARATION:

Legal Notice: In order to provide users with better service, Shenzhen Bat Wireless Technology Co., Ltd. (hereinafter referred to as ' Bat Wireless') will endeavour to present users with detailed and accurate product information in this manual. However, due to the time-sensitive nature of the content in this manual, Bat Wireless cannot guarantee the timeliness and applicability of this document at all times. Bat Wireless reserves the right to update the content of this manual without prior notice. To obtain the latest information, we kindly request users to regularly visit the Bat Wireless official website or contact Bat Wireless staff. Thank you for your understanding and support!

Copyright Notice: All content in this product manual (including text, charts, logos, and designs) is protected by copyright law and international copyright treaties. No entity or individual may reproduce, modify, distribute, or use any part or all of this manual in any form (including electronic, mechanical, photocopying, etc.) without prior written authorisation from our company. Infringers will be held legally liable. All rights reserved.

Trademark Notice: All product names and corporate logos of Bat Wireless mentioned in this manual are the lawful property of our company (including affiliated companies). Unauthorised use, reproduction, or imitation is strictly prohibited. Third-party trademarks referenced in this manual are the property of their respective owners, and their use is solely for illustrative purposes and does not imply any commercial affiliation or authorisation. Our company reserves all rights to pursue legal action against any infringement.

Disclaimer: The product information contained in this manual is for reference only. Actual product performance may vary depending on the usage environment and configuration differences. Our company makes no express or implied warranties regarding the accuracy, completeness, or applicability of the content of this manual and shall not be liable for any direct or indirect losses arising from the use or inability to use the content of this manual. Users should assess the applicability of the product and follow actual operating procedures. The final interpretation of this manual is reserved by our company.

Shenzhen Bat Wireless Technology Co.,Ltd

Office Add: Room 1301, 13th Floor, No. 8 Langhua Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen

Email: marketing@batwireless.com

Tel: 0755-21031236



Documentation

| | |
|-----------|--------------------|
| Version : | August-21-2025-A01 |
| Date : | 2025-8-21 |
| Remarks : | First update |
| Author: | Carly |

Change Log

| | |
|--|--|
| | |
| | |
| | |
| | |