

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃



Contact Material:Brass

Contact Plating:Au Over Ni



Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

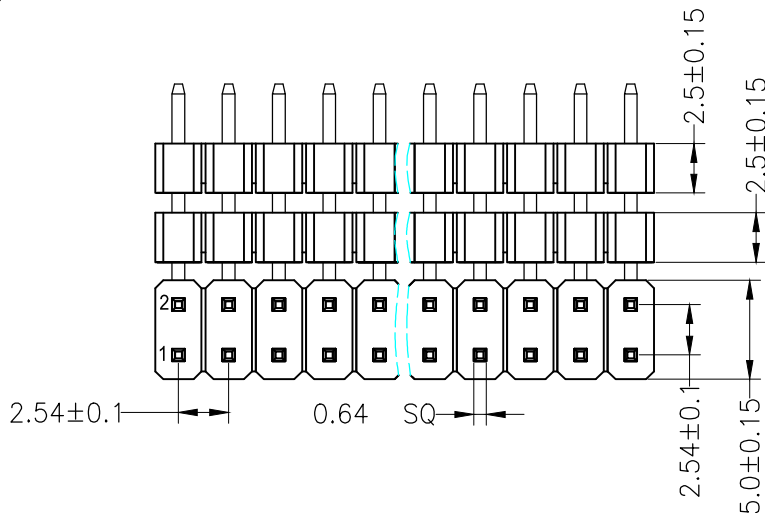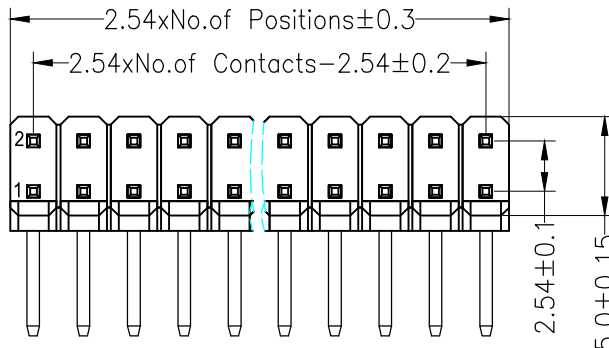

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

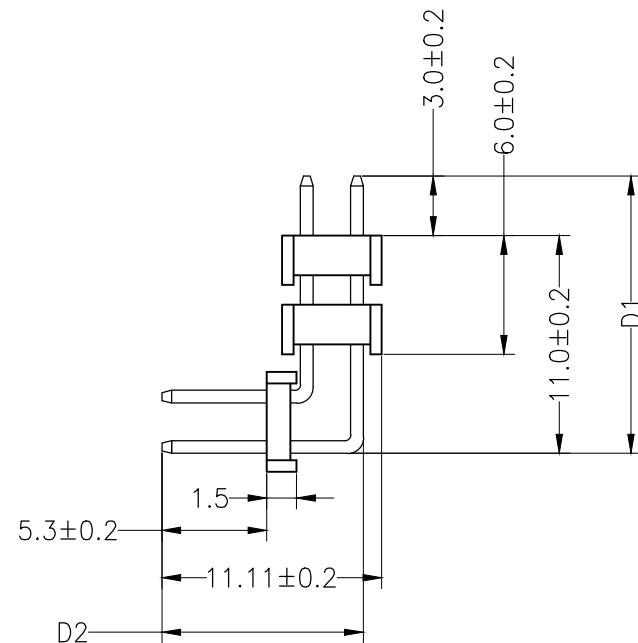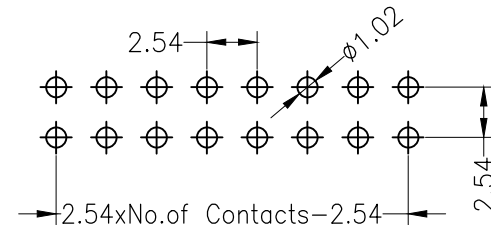

OPERATION

DRAW

SCALE

FIT

X.X ±0.30

CHECK

UNIT

mm

X.XX ±0.20

APPROVE

SIZE

A4

X.XXX ±0.10

Angle

±3°

SHEET

1/1

DIM

TOL

PROJ.

1/1

深圳市连盛精密连接器有限公司

PART NO.

1010300917

TITLE:

2.54PH 3H=2X2.5+1.5 Dual Row 90°

A0 2012.03.28 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE

DIM

TOL

PROJ.

1/1

TITLE:

2.54PH 3H=2X2.5+1.5 Dual Row 90°