

Antenna Datasheet

470MHz Magnetic Mount Antenna

Model:

BW470XWX110-8L1000J

Description:

470Mhz Magnetic Mount Antenna with SMA-J Male RG174 1000mm Length

Features:

470MHz Frequency Range

SMA-J Male

360° Omnidirectional Radiation

Cable Type: RG174

Cable Length: 1000mm

Dimensions: 128mm x 30mm

Compliant with RoHS & REACH Regulations

Contents

1.	Description	3
2.	Specifications	4
3.	Product Picture	5
4.	Mechanical Drawing	6
5.	Testing Equipment	7-8
6.	Performance Data	9-10
6.1	V.S.W.R	9
6.2	Return Loss	9
6.3	Gain	10
6.4	Efficiency	10
6.5	Antenna Gain and Efficiency	10
7.	Radiation Patterns	11-12
7.1	2D Radiation Patterns	11
7.2	3D Radiation Patterns	12



BW470XWX110-8L1000J

Part Number Explanation

BW	Company	Bat Wireless
470	Frequency	470MHz
X	Name	Magnetic Mount Antenna
W	Type	External
X	Constant	X
110-8	Dimensions	110-8mm
L	Length	Length
1000	Cable Length	1000mm
J	Connector	SMA-J Male

Selection Table

Connector	SMA	N	TNC	BNC	SMB	MCX	Customizable
Cable Length	1000	1500	2000	2500	3000	5000	Customizable
Cable Type	RG174	RG178	RG316	RG58			Customizable

1. Description

The BatWireless **BW470XWX110-8L1000J** is a high-performance, omnidirectional external suction cup antenna designed specifically for the 470Hz frequency band. It combines strong penetration, omnidirectional coverage, and lightweight deployment. The antenna's radiator is constructed from high-quality steel-carbon material, ensuring excellent signal transmission and reception performance, suitable for long-term use in complex environments. The suction cup base supports magnetic attachment, providing flexible and stable installation and quick deployment. Its compact and lightweight design further meets the needs of automotive, industrial, and outdoor applications, providing stable, low-loss connectivity for smart home, security surveillance, and industrial IoT devices.

Typical Application Scenarios:

Industrial IoT: Smart electricity/water meters, environmental monitoring equipment

In-vehicle and mobile communications: Logistics vehicle tracking, emergency communication vehicles

Smart devices and commercial applications: Express lockers/vending machines, smart agriculture

Security monitoring: Wireless data transmission for cameras and emergency communication equipment

Bat Wireless provides customized services to optimize your equipment. We have a mature R&D team that can respond quickly to meet your needs. If you have any requirements, please contact our sales and FAE.



2. Specification

Parameters	Typ.	Unites	Notes
Electrical Characteristics			
Antenna Type	Magnetic Mount Antenna		
Frequency Range	470	MHz	
Input Impedence	50	Ω	
V.S.W.R	<2.7		
Gain	1.7	dBi	
Polarization Type	Vertical		
Power Capacity	50	W	
Lightning Protection	-		
DC Voltage	-	V	
Radiator	-		
Mechanical Characteristics			
Dimensions	128 x 30	mm	
Connector Type	SMA-J Male (Customizable)		
Cable Type	RG174		
Cable Length	1000	mm	
Mount way	Screw-on		
Color	Black		
Meterial	Material		
Weight	26	g	
Environmental Characteristics			
Waterproof Rating	-		
ROHS Compliant	Compliant		
Operating Temperature	-45~ +85	$^{\circ}\text{C}$	
Storage Temperature	-45~ +85	$^{\circ}\text{C}$	

3. Product Picture




4. Mechanical Drawing

PARTS DRAWING ROHS Compliant

REV	PRODUCT NO.	DATE	NAME	DESCRIPTION

- Requirements:
- The wire jacket shall be free from cuts or damage.
 - 100% continuity testing shall be performed, and all products must pass.
 - 100% full inspection is required, and all products must meet specifications.
 - Eco-friendly manufacturing processes shall be adopted, and finished products must comply with ROHS requirements.
 - Unless otherwise specified, general tolerances shall apply.

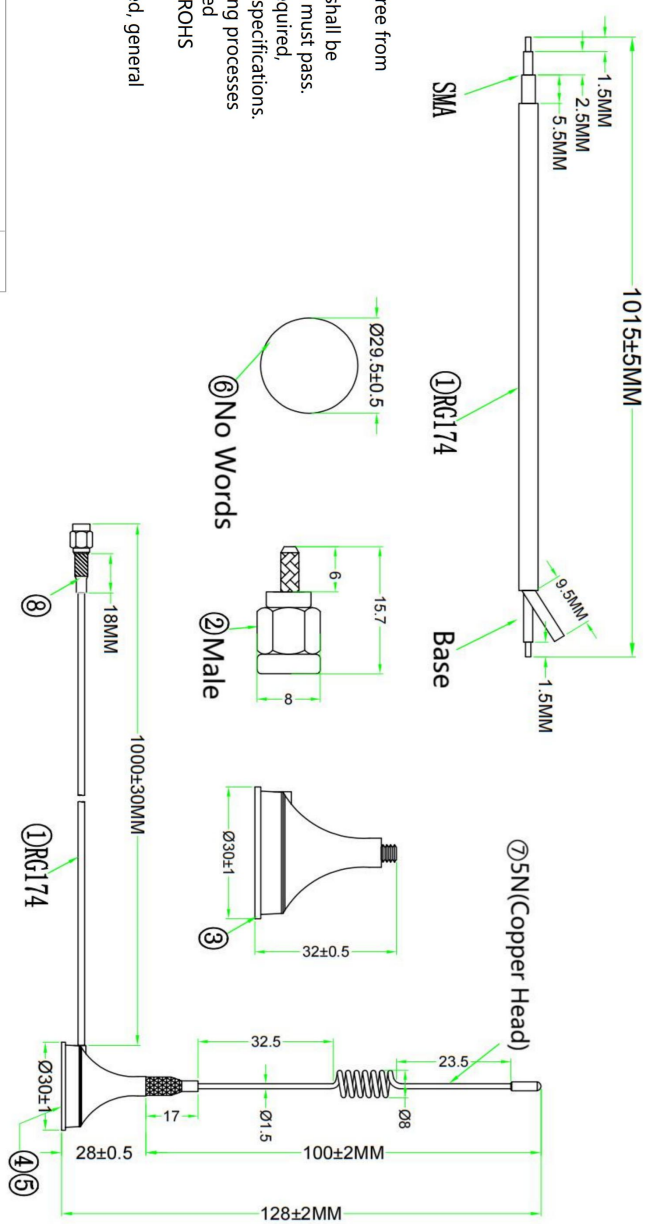

NO	Code	Name	Description	Q'ty
8		Heat Shrink Tubing	18*3.5MM Black	1
7		Steel Wire	5N Copper Head L=100MM	1
6		Sticker	No Words	1
5		Magnet	2*1.5MM Single-Sided Magnet	1
4		Metal Piece	24*2.4MM	1
3		Base	30*32MM Small Flanged Suction Cup	1
2		SMA	Male	1
1		Wire	RG174 Black L=1015MM	1

Frequency		470MHz
Gain		1.7DBI
VSWR		< 2.7
Polarization		Vertical
Impedance		50Ω
Operating Temperature		-45°C~85°C
Storage Temperature		-45°C~85°C
ANGLE PROJECTION		
GENERAL TOLERANCE		100~200: ±3.00 50~100: ±2.00 25~50: ±0.20 10~25: ±0.15 1~10: ±0.10
PRODUCT NAME		
Magnetic Mount Antenna-470MHz-SMA Male-L=1000MM		
UNIT	MM	SIZE
PAGE	1 OF 1	FORMIT
		A4

5. Test Equipment




Keysight/E5071C Network Analyzer



R&S/CMW500 Comprehensive Tester



R&S/SMBV100B Signal Generator

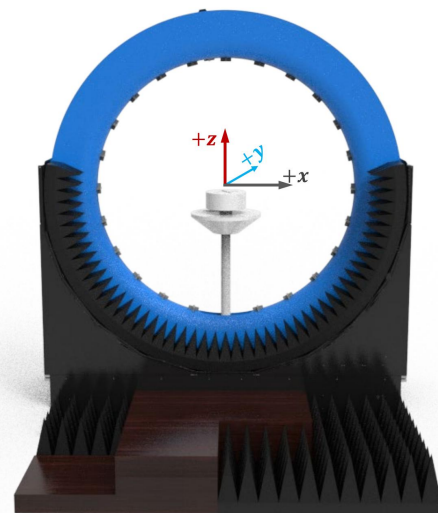

DT-3500 Datasheet

Specification:

Specification:	Description
Test Frequency	400MHz-8.5GHz
System Size	L*W*H=4*3.5*3.5m
Number of Probes	23 (Probe) + 1 (link)
Interval Angle	15°
Sampling Diameter	2200mm
Carring Capacity	≤40kg

Testing Capability

Description

Active measurement

Capability : TRP、TIS、EIRP、EIS,. etc
Mode : 2G/3G/4G/5G、Wi-Fi b/g/n/a/ac/ax、BT、NB-IOT、Cat-M (eMTC)、GPS/BEIDOU/GLONASS、ZigBee、LoRa(Non-Signaling),.etc

Passive measurement

Test category : Gain、Efficiency、2D pattern、3D pattern、Pattern roundness、Axial Ratio、ECC,Phase center,. etc
Polarization : Circular polarization, linear polarization, elliptical polarization



RF Link diaram of multi probe spherical near-field testing system

RF Link Overview



RF Link of Passive measurement



RF Link Overview




RF Link of Passive measurement




6. Performance Data

6.1 VSWR

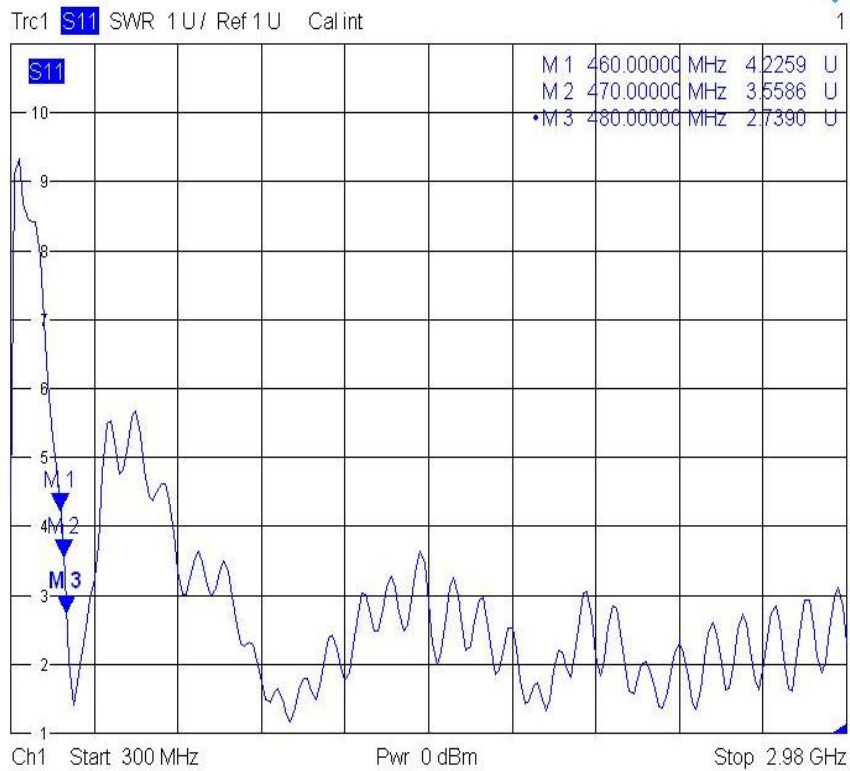


6.2 Return Loss

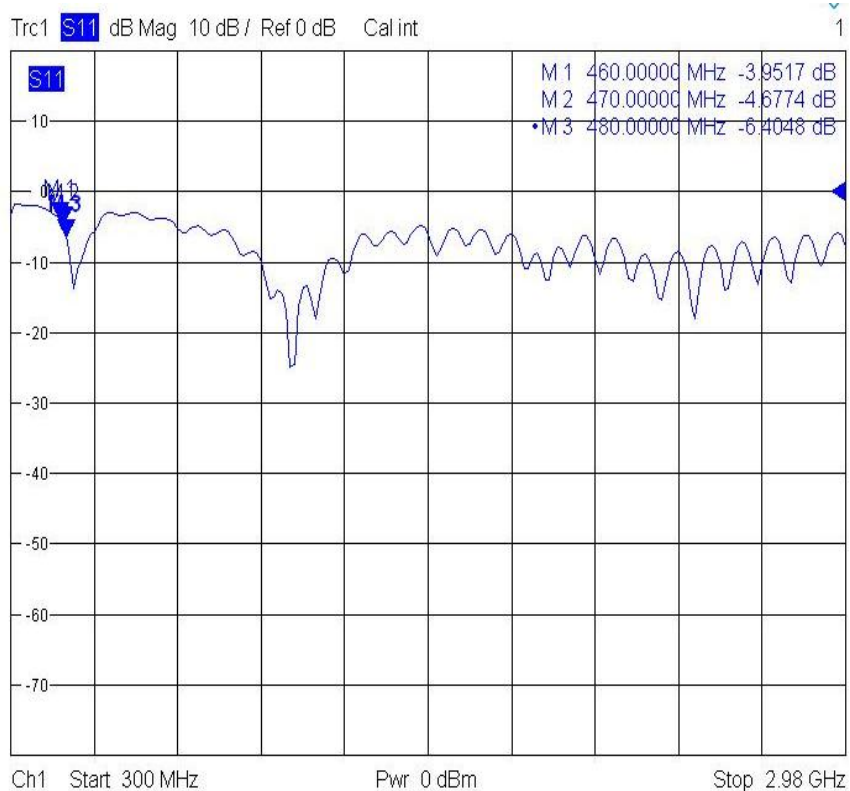


6. Performance Data

6.3 Gain

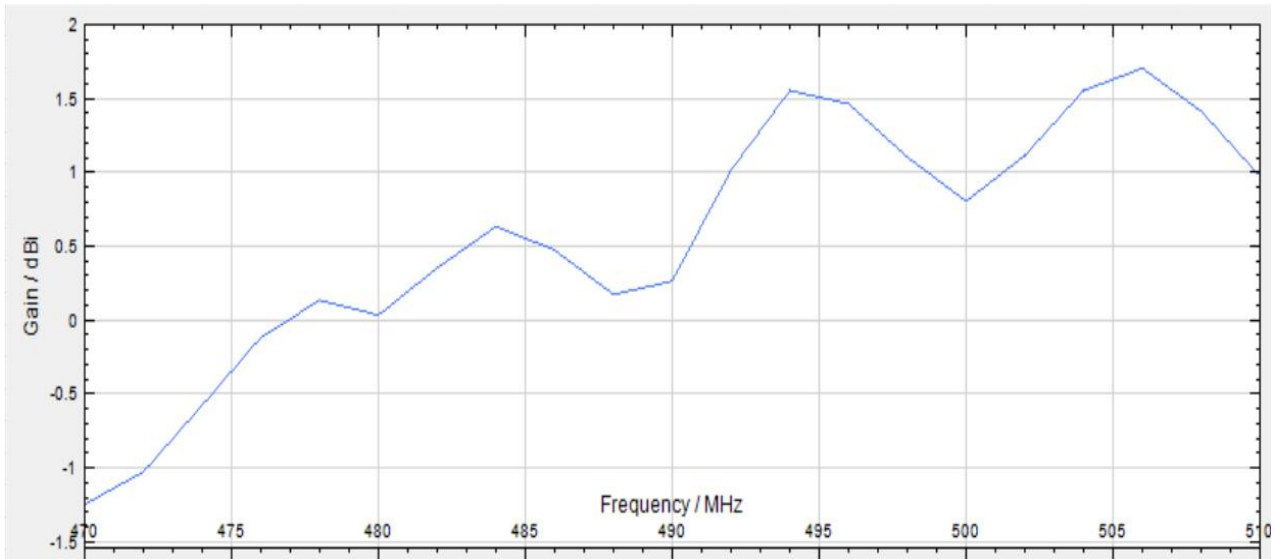

6.4 Efficiency

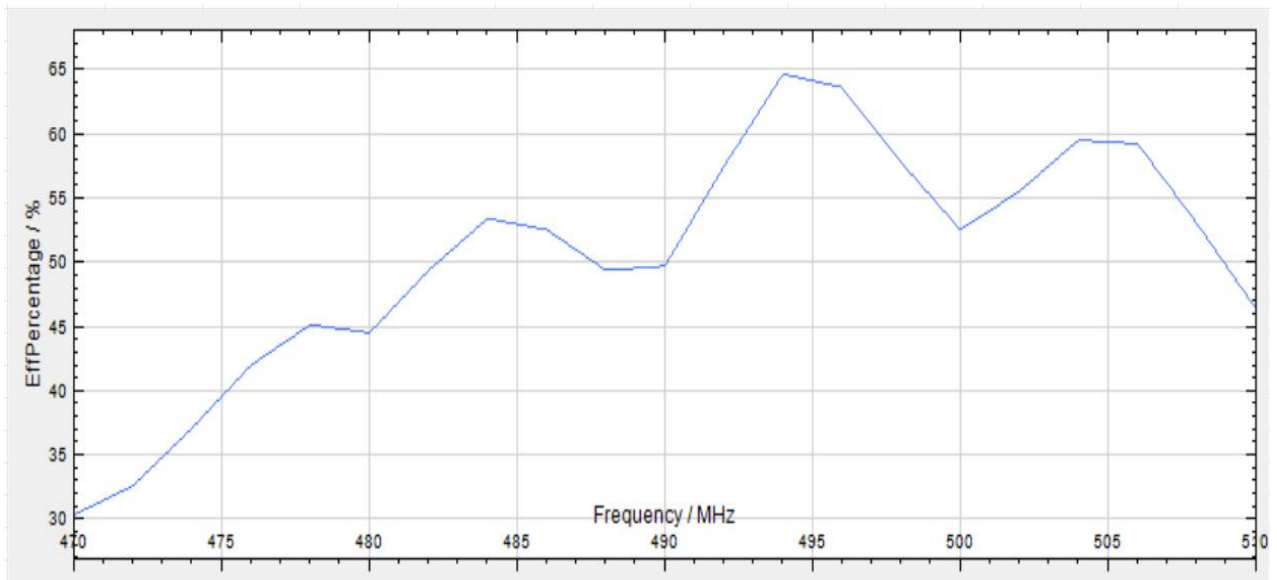


6.5 Gain and Efficiency

Frequency (MHz)	470	490	510
Gain (dBi)	-1.24	0.27	0.98
Efficiency (%)	30.41	49.77	46.45



7. Radiation Patterns

7.1 2 D Radiation Patterns


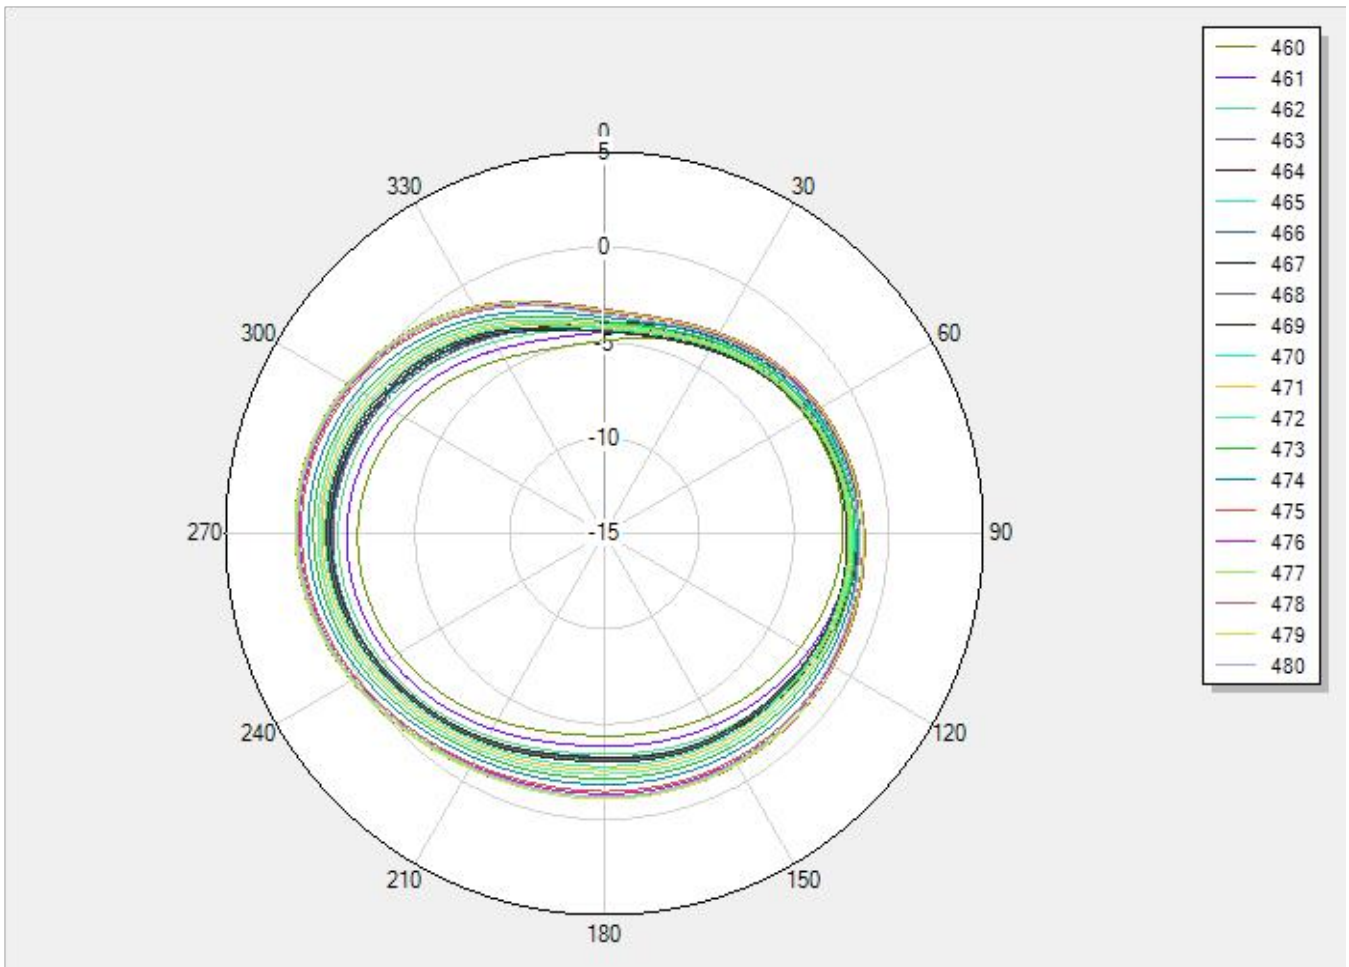




7.2 3D Radiation Patterns—460MHz、470Mhz

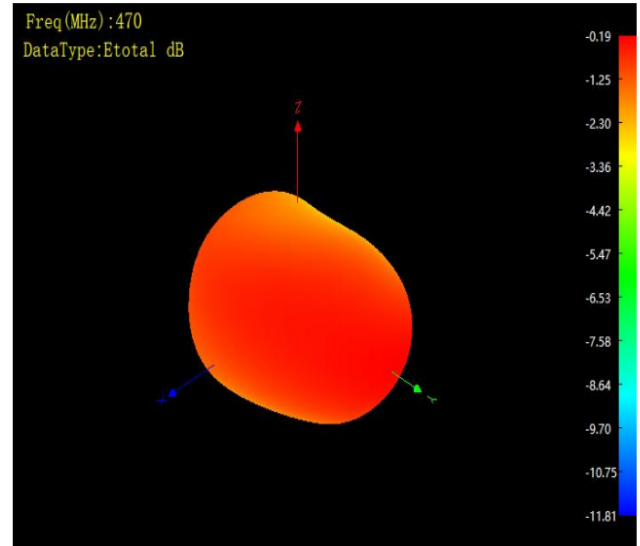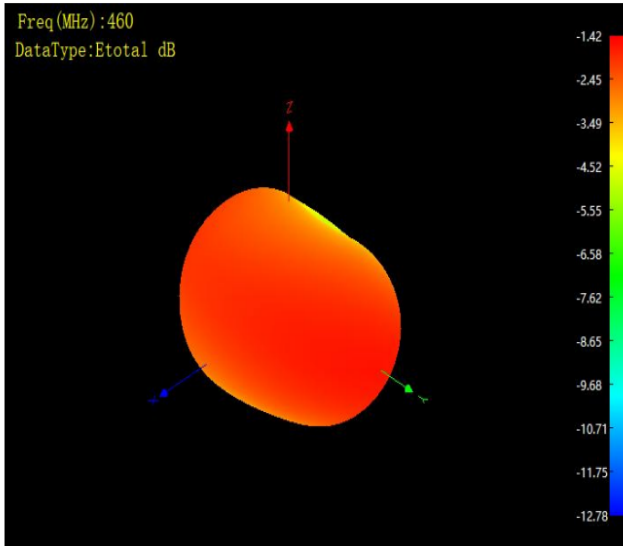

7.2 3D Radiation Patterns—480MHz

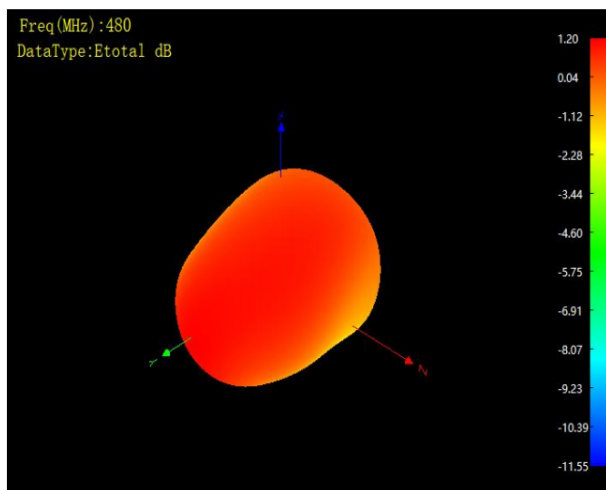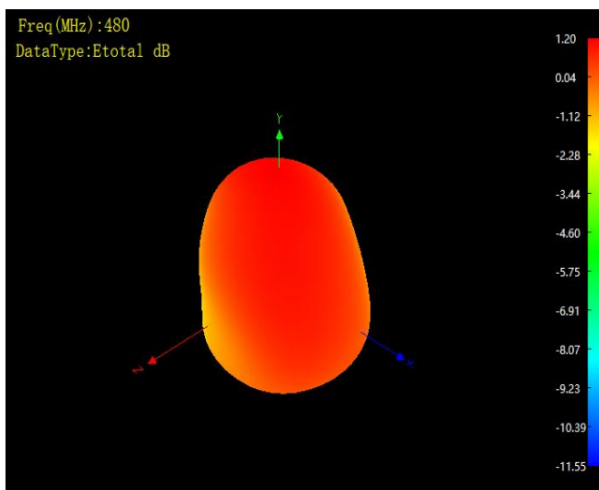



DECLARATION:

Legal Notice: In order to provide users with better service, Shenzhen Bat Wireless Technology Co., Ltd. (hereinafter referred to as ' Bat Wireless') will endeavour to present users with detailed and accurate product information in this manual. However, due to the time-sensitive nature of the content in this manual, Bat Wireless cannot guarantee the timeliness and applicability of this document at all times. Bat Wireless reserves the right to update the content of this manual without prior notice. To obtain the latest information, we kindly request users to regularly visit the Bat Wireless official website or contact Bat Wireless staff. Thank you for your understanding and support!

Copyright Notice: All content in this product manual (including text, charts, logos, and designs) is protected by copyright law and international copyright treaties. No entity or individual may reproduce, modify, distribute, or use any part or all of this manual in any form (including electronic, mechanical, photocopying, etc.) without prior written authorisation from our company. Infringers will be held legally liable. All rights reserved.

Trademark Notice: All product names and corporate logos of Bat Wireless mentioned in this manual are the lawful property of our company (including affiliated companies). Unauthorised use, reproduction, or imitation is strictly prohibited. Third-party trademarks referenced in this manual are the property of their respective owners, and their use is solely for illustrative purposes and does not imply any commercial affiliation or authorisation. Our company reserves all rights to pursue legal action against any infringement.

Disclaimer: The product information contained in this manual is for reference only. Actual product performance may vary depending on the usage environment and configuration differences. Our company makes no express or implied warranties regarding the accuracy, completeness, or applicability of the content of this manual and shall not be liable for any direct or indirect losses arising from the use or inability to use the content of this manual. Users should assess the applicability of the product and follow actual operating procedures. The final interpretation of this manual is reserved by our company.

Shenzhen Bat Wireless Technology Co.,Ltd

Office Add: Room 1301, 13th Floor, No. 8 Langhua Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen

Email: marketing@batwireless.com

Tel: 0755-21031236



Documentation

Version :	August-21-2025-A01
Date :	2025-8-21
Remarks :	First update
Author:	Carly

Change Log
