



Sensors > Pressure Sensors > Media Isolated Pressure Sensors > Differential MV Output Pressure Sensor



Pressure: [30 psi]

Pressure Sensor Type: mV Output Pressure Sensors

Pressure Type: Differential

Supply Voltage Range: 5 V

Operating Temperature Range: -40 – 125 °C [-40 – 257 °F]

[All Differential MV Output Pressure Sensor \(8\)](#)

Features

Product Type Features

Pressure Sensor Type	mV Output Pressure Sensors
Pressure Type	Differential
Sensor Package	O-Ring Mount

Electrical Characteristics

Supply Current	1.5 mA
Supply Voltage Range	5 V

Dimensions

Product Diameter	15.82 mm[.622 in]
Product Height	17.52 mm[.69 in]

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Proof Pressure Range	3X
	30 psi

Other

--	--



Non-Linearity ±	.1 %
Port Fitting	O- Ring Mount

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | MEAS DP86 Series



Media Isolated Pressure Sensors(8)

Customers Also Bought



TE Part #66105-4
III+ SKT,24-20,30AU/FL,LP



TE Part #3-770522-1
SL156 HOODED CONTACT, LP LF




TE Part #1-770849-3
13P SL156 HSG W/LCK RMP & TABS



TE Part #DP86-001D
Differential MV Output Pressure Sensor



TE Part #5052894108
RNF-100-1/16-BK-SP

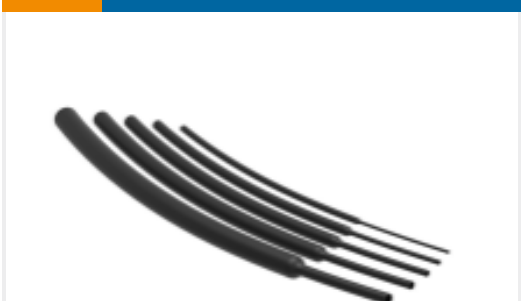

TE Part #NB13264001
RNF-100-BK Heat Shrink Tubing



TE Part #EM6977-000
X4-0.6-0-SP



TE Part #81542-23
CONT SOC ASSY

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DP86-030D_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DP86-030D_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DP86-030D_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

DP86

English

