
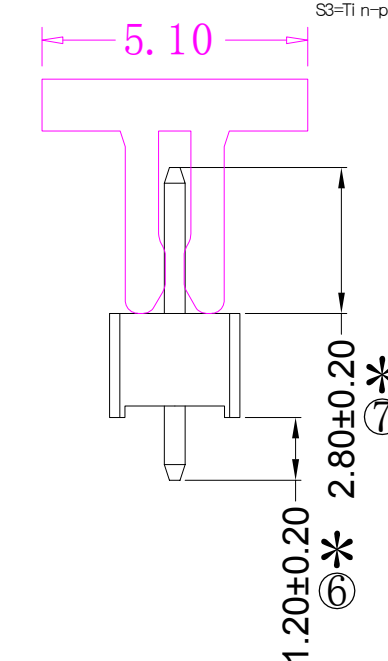
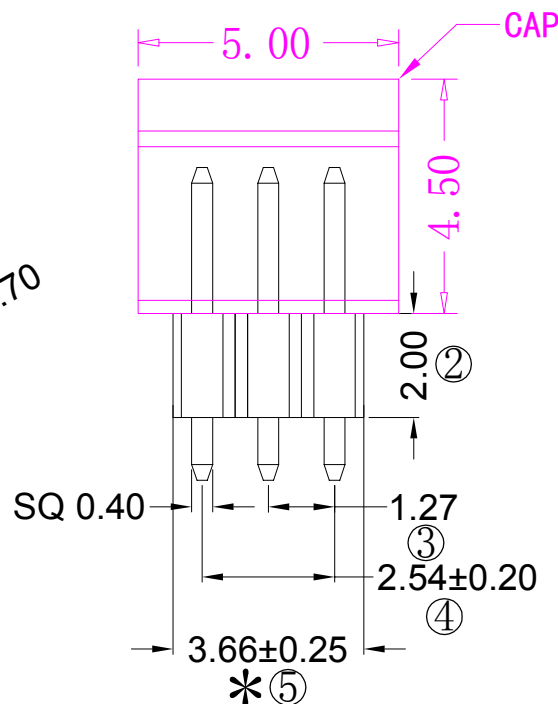
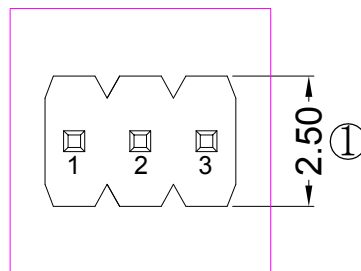


Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA9T+30%G.F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀普金
Contact: Brass, GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Rating Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C



Ordering Information

P320-11 03 A0 C S 060 B 1

HEIGHT OF HOUSING
16: 1.6mm
20: 2.0mm
25: 2.54mm

NO. OF PINS PER ROW
1-50P

Contact Full of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Plating Semi-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"

INSULATOR LENGTH MATERIAL: OF TERMINAL
B: PA6T
C: PA9T
D: LCP


PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

RoHS
COMPLIANT

1. 带*为品质重点检验尺寸

注意事项

				OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	李官淼2022.08.10	PART NO	P320-1103A0CS060B1	
				X.XXX	±0.10							
A0	2022.08.10	/	新版发行	Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27*2.0排针 1*3P L=6.0/1.2 180度 0.4孔 PA9T料 镀普金 CAP+卷装1000PCS	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		