





SCHEMATIC

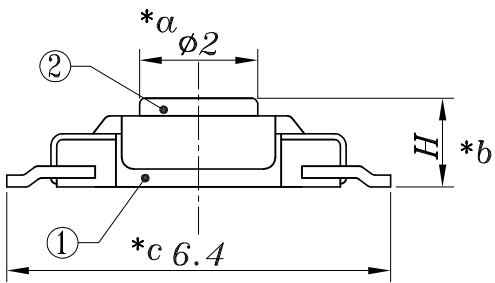

- SPECIFICATION
1. Rating : DC12V 50mA.
 2. Contact resistance: $\leq 100\text{m}\Omega$.
 3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC100V).
 4. Withstanding voltage: 250VAC .
 5. Operating Force: $300\pm 50\text{gf}$
 6. Travel: $0.15\pm 0.1\text{mm}$.
 7. life test: 10,000 cycles.
 8. Operation temperature range: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
 9. Sign"* "is importance dimension.

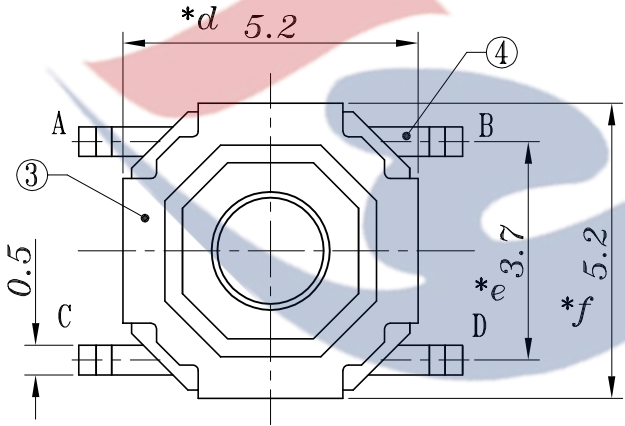

H=XXmm

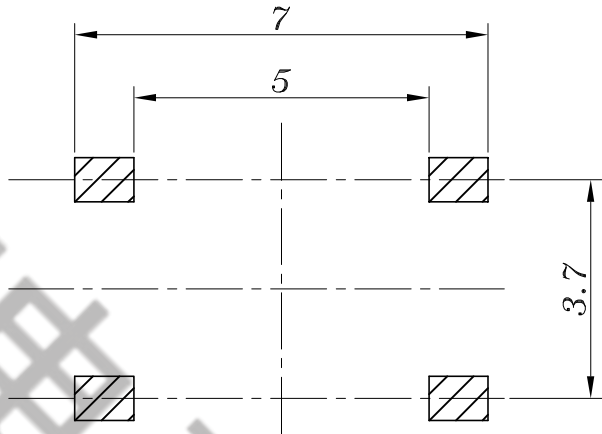

P.C.B LAYOUT
TOP VIEW

					TOLERANCE UNLESS SPECIFIED							
					<1.5: ±0.1mm >1.5~5.0: ±0.25mm >5.0: ±0.3mm	ANGULAR ±1°	A1	2024.6.26	△ 接触脚材质更改为磷铜		YKH	
5	CONTACT	SUS	1	Ag-Plated			NO	DATE	REVISIONS		BY	APPD
4	CONTACT FOOT	PHOSPHOR BRONZE △	4	Ag-Plated	TITLE: TACT SWITCH			UNIT : MM		ROHS	DWN	
3	COAT	SUS	1	NI-Plated	MODEL: TS-1187-015F PPA			SCALE: 1:1		COMPLIANT	CHK'D	
2	BUTTON	BRASS	1		 DONGGUANG HAOYU ELECTRONICS CO., LTD 皓宇 HAOYU 东莞市弘皓电子有限公司			APPD				
1	HOUSING	PPA	1									
NO.	PART	NAME	MATERIAL	QTY	FINISHING				PRO.AGL: 		REV :A1	