



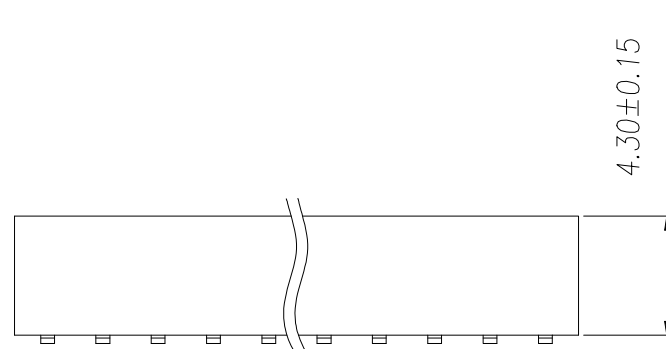

Current Rating: 1.5 Amps
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Withstanding Voltage: AC 500V
Operation Temperature: -40 $^{\circ}$ to +105 $^{\circ}$
Contact Material: Brass
Standard: PA6T
Insrlator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 5 seconds)

<i>P/N</i>	<i>PIN</i>	<i>DIM.A</i>	<i>DIM.B</i>
<i>BX-PM2.0-2- 1PUW</i>	1	0.00	2.00
<i>BX-PM2.0-2- 2PUW</i>	2	2.00	4.00
<i>BX-PM2.0-2- 3PUW</i>	3	4.00	6.00
<i>BX-PM2.0-2- 4PUW</i>	4	6.00	8.00
<i>BX-PM2.0-2- 5PUW</i>	5	8.00	10.00
<i>BX-PM2.0-2- 6PUW</i>	6	10.00	12.00
<i>BX-PM2.0-2- 7PUW</i>	7	12.00	14.00
<i>BX-PM2.0-2- 8PUW</i>	8	14.00	16.00
<i>BX-PM2.0-2-9PUW</i>	9	16.00	18.00
.....			
<i>BX-PM2.0-2-40PUW</i>	40	$(PIN-1) \times 2.0$	$(PIN) \times 2.0$

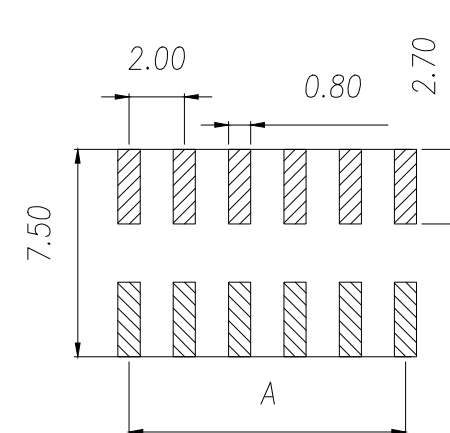

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

制图 DRAWN	充更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	Yu			料号 PART NO.	BX-PM2.0-2-NPUW	版本 REV.	A
			DECIMALS:	ANGLES:	审核 CHECK	HUANG			品名 TITLE	2.0FH H4.3 2xnPin SMT W4.5 U# PC6.5 PB4.6 6T	页次 SHEET	1/1
			X.±0.30	X°±5°	核准 APPROVAL	RUAN			客户料号 CUTM.NO.			
			X.X±0.20	X.X°±1°								
			X.XX±0.10	X.XX°±0.5°	单位 UNITS	MM	比例 SCALE	1:1	Bossie (博锡)			