


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

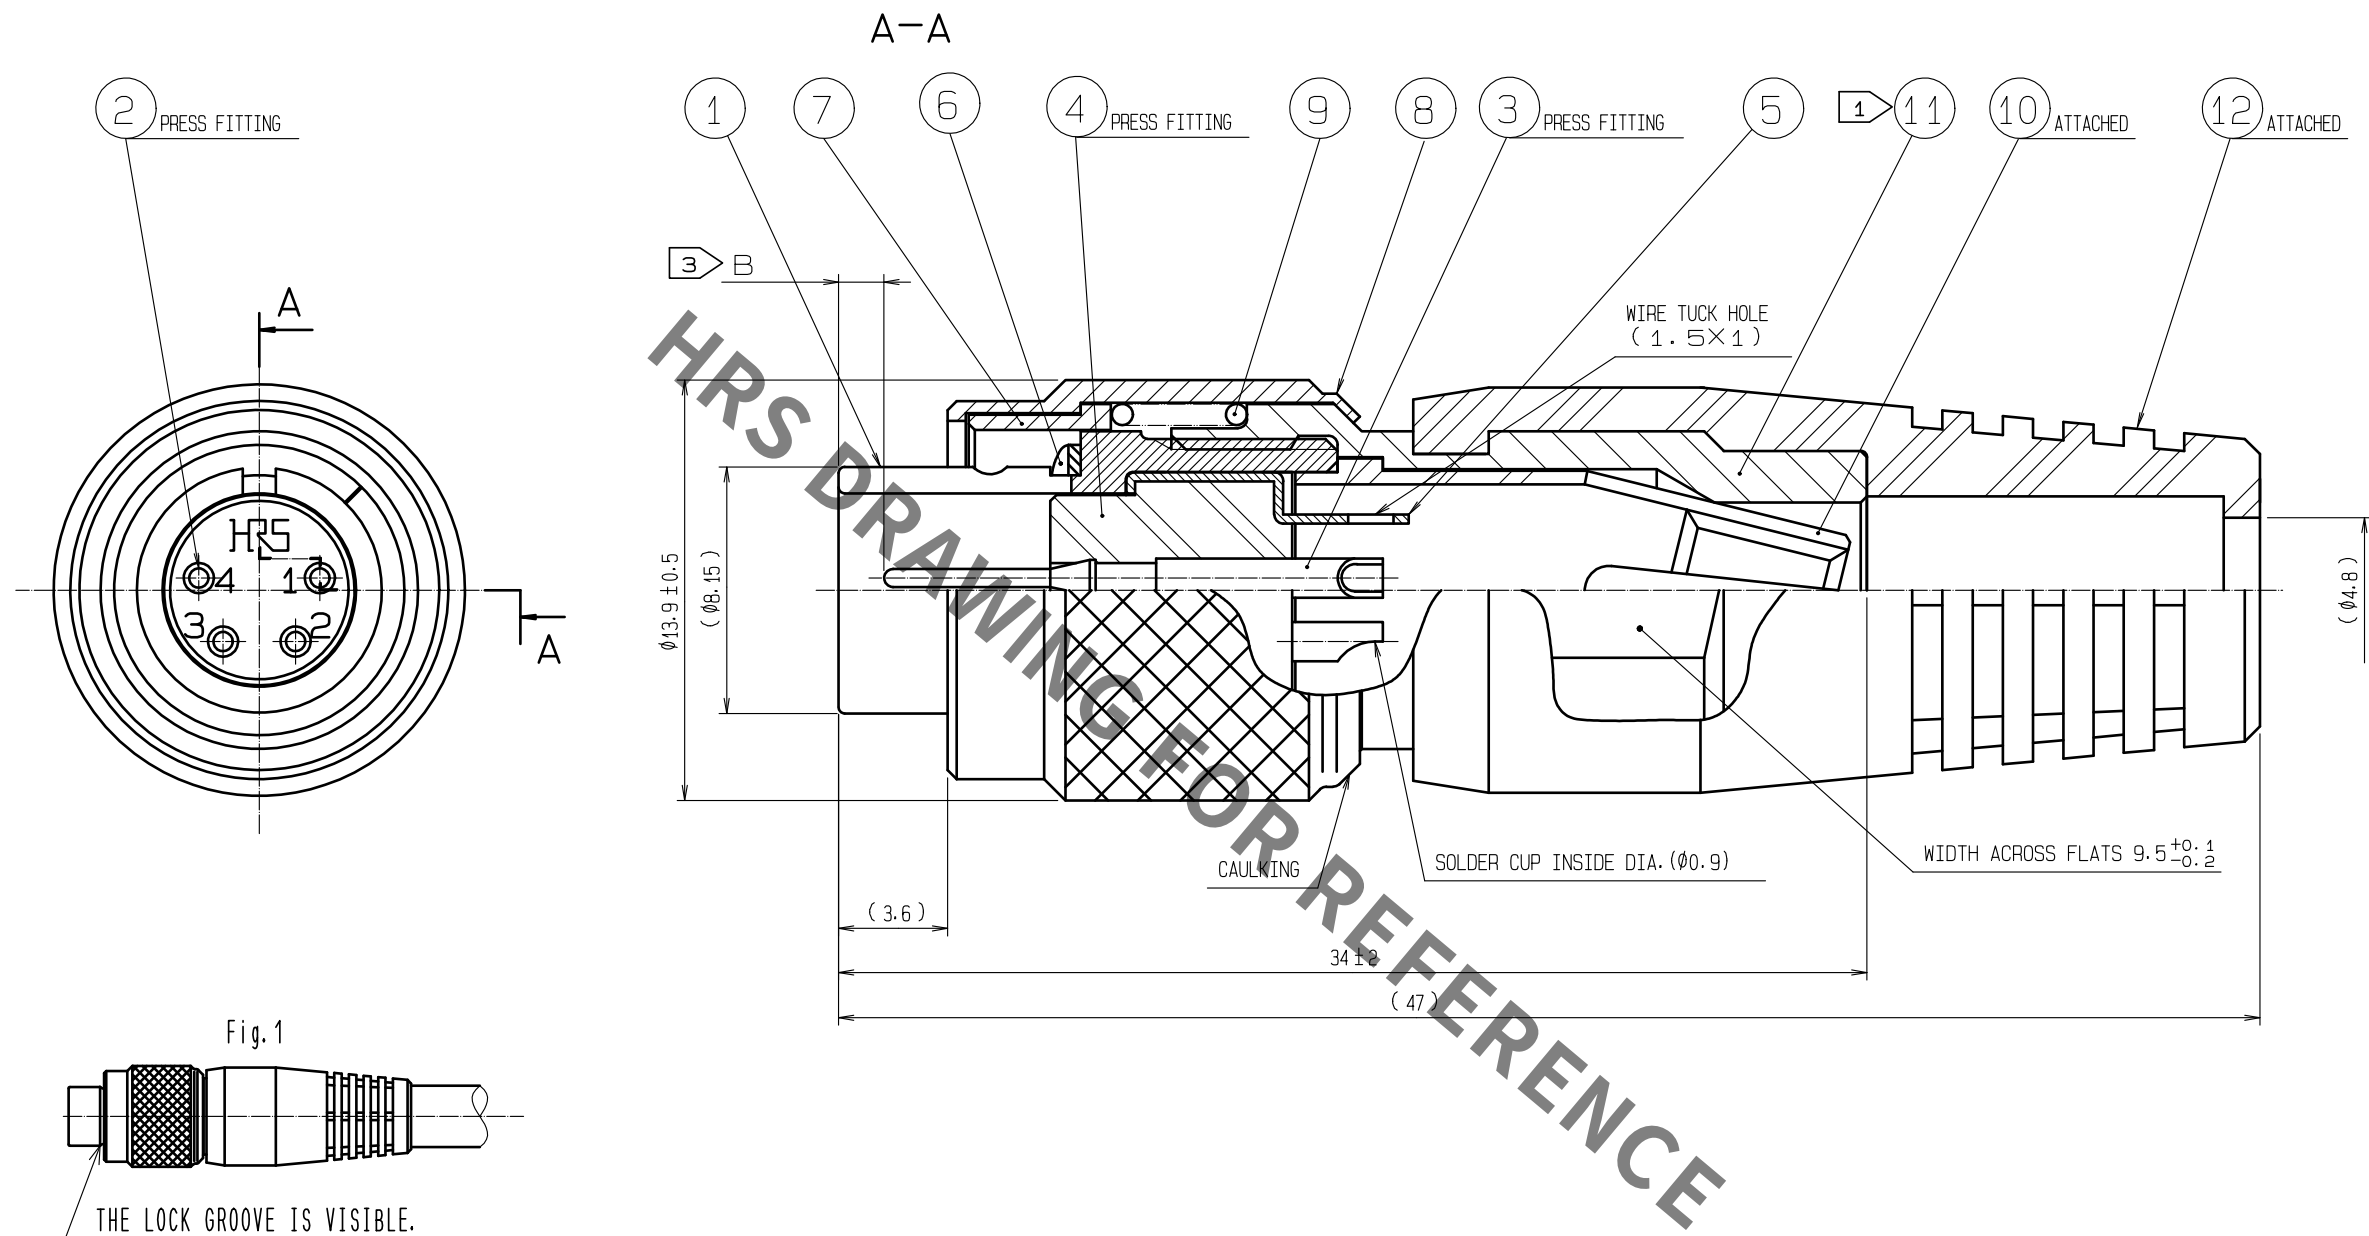

- NOTES
- 1 THE RECOMMENDED CLAMP TORQUE OF REF.NO. 11 : 1 N·m.
LOCTITE 263, HENKEL JAPAN IS RECOMMENDED TO REF.NO. 11 FROM LOOSENING.
 - 2 ROTATION EXAMPLES OF REF.NO. 1 AND 11 ARE SHOWN.
 - 3 B DIMENSION IS FOLLOWING. CONTACT NO. 1 : (1.5)
CONTACT NO. 2 TO 4 : (3)
 - 4 SURFACE PLATING : GOLD PLATING 0.2µm min.
UNDER PLATING : NICKEL PLATING 3µm min.
 - 5 Fig. 1 REPRESENTS THE PRODUCT APPEARANCE AFTER IMPROPER ASSEMBLY.
IF THE LOCK GROOVE IS VISIBLE, NO. 1 AND NO. 11 MAY NOT BE ASSEMBLED CORRECTLY.

6	BERYLLIUM COPPER	NICKEL PLATING	12	SIR	(BLACK)
5	PHOSPHOR BRONZE	TIN PLATING	11	BRASS	NICKEL PLATING
4	PBT	(BLACK) UL94V-0	10	POLYACETAL	
3	BRASS	4	9	STEEL	NICKLE PLATING
2	BRASS	4	8	BRASS	MATTE FINISH NICKEL PLATING
1	ALUMINUM ALLOY	NICKEL PLATING	7	STAINLESS STEEL	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 4 : 1	COUNT 1	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
			1	DIS-C-00005509	KN. IKEHARA	HS. KAWASHIMA	20210325
			APPROVED :MR. YOSHIDA 20050105		DRAWING NO. EDC3-110275-71		
			CHECKED :MO. SATOH 20050105		PART NO. MXR-8PA-4PB(71)		
			DESIGNED :YH. YAMADA 20050105		CODE NO. CL0127-0004-9-71		
DRAWN :YH. YAMADA 20050105					1		

HRS

HIROSE ELECTRIC CO., LTD.