

Rohs

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance: 20m Ω Max

Withstand Voltage:400V AC/DC

Insulation Resistance: 800M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass



Contact Plating: Au Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds

(260°C for 10 seconds)

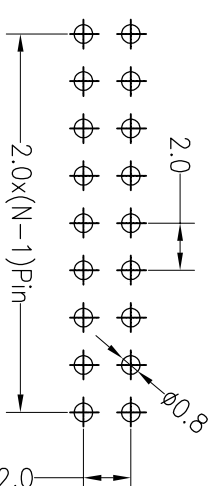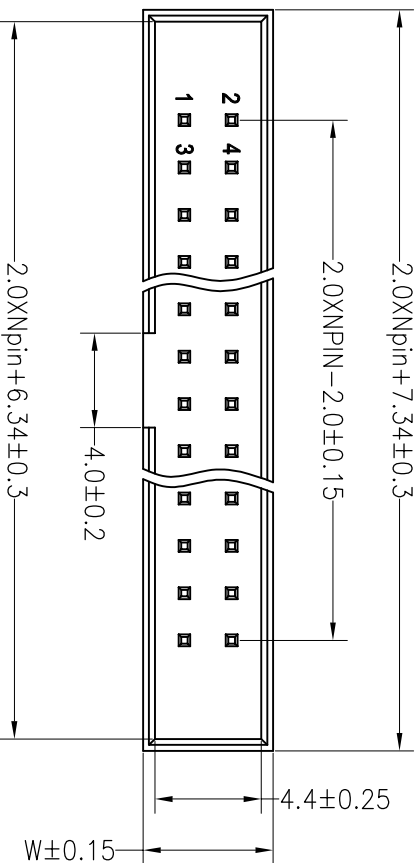

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Ordering Information

[illegible]

产品类型
J=筒牛

间距 1=1.27

总Pin数 016=16F

产品形态
1=DIP

00=常规

塑膠材料
1=PBT

塑胶颜色
1=黑色

包裝方式
1=管裝

序列号
0001-9999

$$A=1.27 \times 2.54$$



...

9=PA9T

6=黃色

U=盘状

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		2.8		5.65	5.5
002					

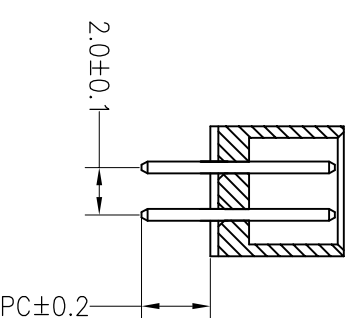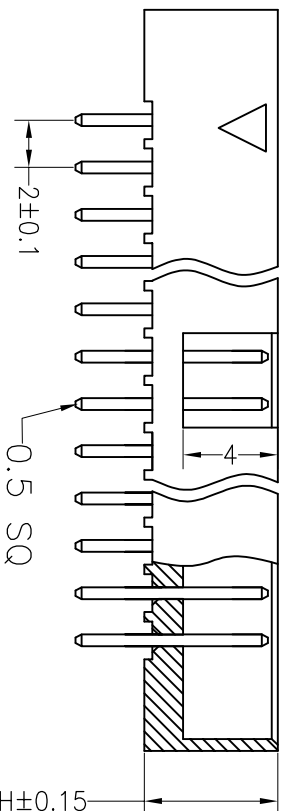

							深圳市连盛精密连接器有限公司			
							SCALE	FIT		
							UNIT	mm		
							SIZE	A4		
							SHEET	1/1		
							PROJ.			
							TITLE:			
							PART NO.		1030200137	
							TITLE:		2.0Box Npin H5.65 180°	
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	DIM	TOL	APPROVE			
A0	2012.03.28		NEW DRAWING		Angle	±3°				
					X.XXX	±0.10	CHECK			
					X.XX	±0.20				
					X.X	±0.30	DRAW			