

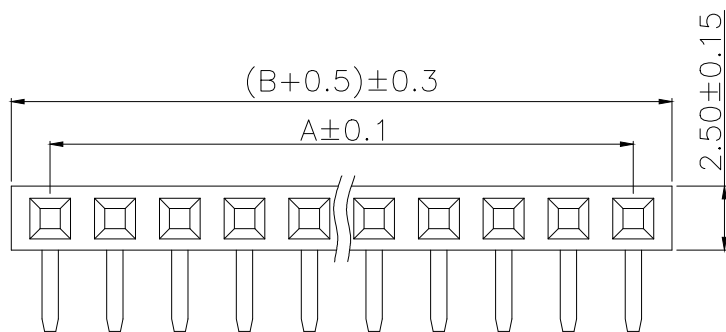


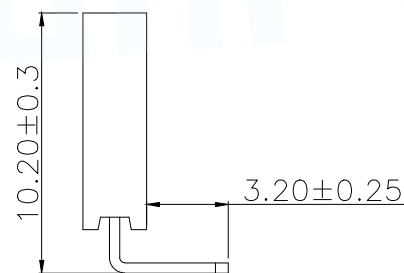

## SPECIFICATIONS

Current Rating: 3Amps  
Insulation Resistance: 1000MΩ Min  
Contact Resistance: 20mΩ Max  
Withstanding Voltage: AC 1000V  
Operation Temperature: -40°to+105°  
Contact Material: Brass  
Standard: PA6T  
Insulator Material: Polyester(UL 94V-0)  
Contact Plating: Gold Flash  
Max.Processing Temp: 240°C for30-60seconds  
(260°C for5seconds)

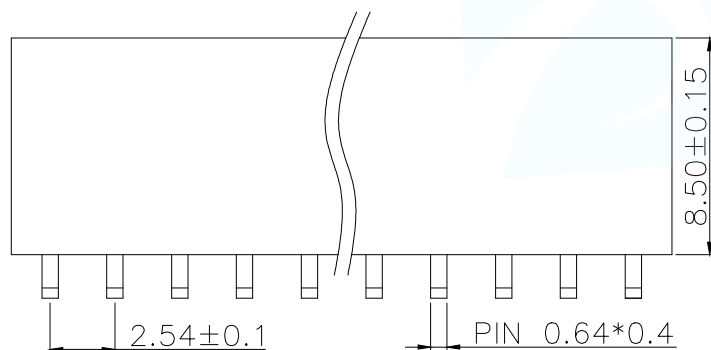

## PART NUMBER DESCRIPTION:


FH2.54-06-NPWD

(D=单排;S=双排)

(Z=直脚;W=弯脚)

(PIN数量;01.....40PIN)

(排针开关)

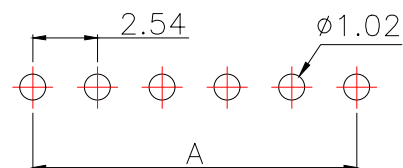

RECOMMEND P.C.B LAYOUT  
PCB TOLERANCE:±0.05 (TOP VIEW)

| P/N             | PIN   | DIM.A        | DIM.B      |
|-----------------|-------|--------------|------------|
| FH2.54-06-01PWD | 1     | 0.00         | 2.54       |
| FH2.54-06-02PWD | 2     | 2.54         | 5.08       |
| FH2.54-06-03PWD | 3     | 5.08         | 7.62       |
| FH2.54-06-04PWD | 4     | 7.62         | 10.16      |
| FH2.54-06-05PWD | 5     | 10.16        | 12.70      |
| FH2.54-06-06PWD | 6     | 12.70        | 15.24      |
| FH2.54-06-07PWD | 7     | 15.24        | 17.78      |
| FH2.54-06-08PWD | 8     | 17.78        | 20.32      |
| FH2.54-06-09PWD | 9     | 20.32        | 22.86      |
| .....           | ..... | .....        | .....      |
| FH2.54-06-40PWD | 40    | (PIN-1)X2.54 | (PIN)X2.54 |

|                                       |            |                                                                                                                                           |                                                    |
|---------------------------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| MANUFACTURE DWG                       |            |  东莞市讯普电子科技有限公司<br>DongGuan XunPu Electronics Co.,Ltd |                                                    |
| UNLESS OTHERWISE SPECIFIED TOLERANCES |            |                                                      | TITLE:2.54FH H8.5 1xnPin 90度<br>Y型 PC3.2 PB10.2 6T |
|                                       |            |                                                                                                                                           | PAR FH2.54-06-NPWD                                 |
| DECIMALS:                             | ANGLES:    |                                                                                                                                           | DWN                                                |
| X.±0.30                               | X'±5'      |                                                                                                                                           | CHKD                                               |
| X.X±0.20                              | X.X'±1'    |                                                                                                                                           | APVD                                               |
| X.XX±0.10                             | X.XX'±0.5' |                                                                                                                                           | SCALE N:A                                          |
| CUSTOMER COPY                         |            | SIZE:A4                                                                                                                                   | UNIT:MM                                            |
|                                       |            | SHEET:1F1                                                                                                                                 | REV:A                                              |