


Temperture Range: -40° C to+105° C

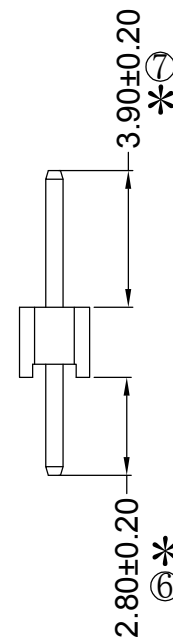

HEIGHT OF HOUSING	NO. OF PINS PER ROW	CONTACT FULL COLD	PLATING SERIAL-GOLD	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
10: 1.0mm	1~40P	A0=0.8u"	B0=0.8U"	B: PA6T		A: PE Bag
15: 1.5mm		A1=1u"	B1=1U"	C: PA9T		B: Tape & Reel
20: 2.0mm		A2=1.5u"	B2=1.5U"	D: LCP		C: Tube
		A3=2u"	B3=2U"			D: Tube+CAP
		A4=3u"	B4=3U"			E: Tray
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Quaternary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

注 1. 带*为品质重点检验尺寸

注意事项

				OPERATION		SCALE		Fit	YXCON 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	李青杰2023.05.22	PART NO	P220-1106A0BS087A1
				X.XXX	±0.10						
A0	2023.05.22	/	新版发行	Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0排针 1*6P L=8.7/2.8 180度 PA6T 镀普金
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	