

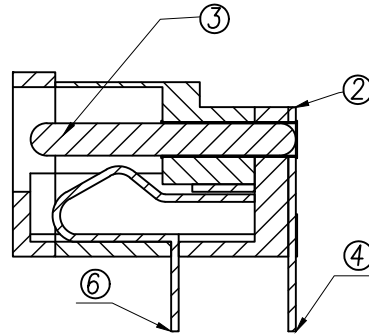
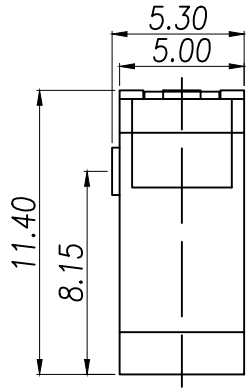
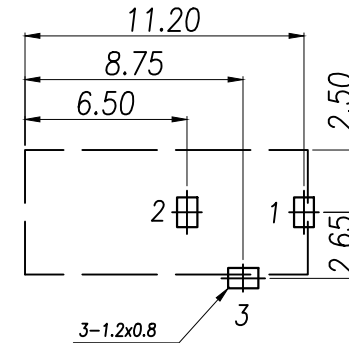
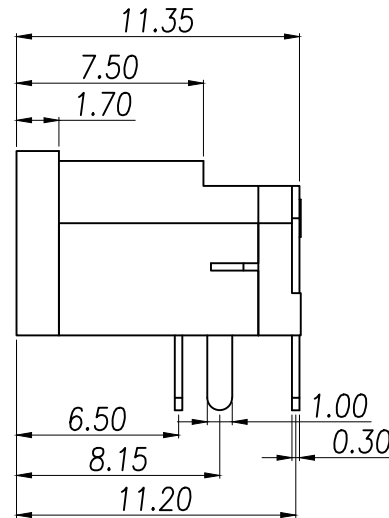


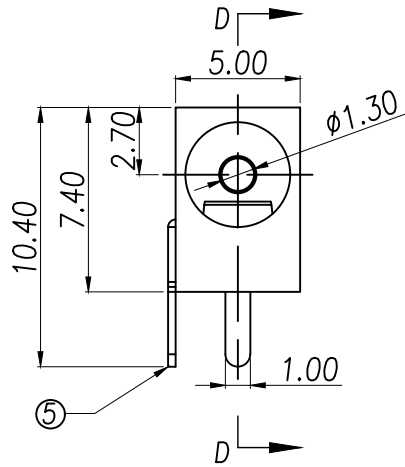

D-D




PCB.WELDING DRAWING (TOLERANCE:±0.05)

6	料片	1	H62	镀镍
5	料片	1	H62	镀镍
4	料片	1	H62	镀镍
3	中心料	1	H62	镀镍
2	盖帽	1	PPA	黑
1	底座	1	PPA	黑
料号	名称	数量	材料	备注

Main technical performance

Rated electrical load	DC 12V 2A
Contact resistance	≤30mΩ
Insulation resistance	>100MΩ DC500V
Pressure resistance	AC 500V 1min
Insertion force	3~30N
Operating temperature range	-20C°~+70C°
service life	5000cycles



SCHEMATIC

DIMENSION in mm		厦门市辛译精密电子有限公司 Xiamen XinYi Xyeconn Electronics Co.,Ltd					
TOLERANCE UNLESS OTHERWISE SPECIFIED							
.X±0.3	X.*± 5	APR.	Alex	TITLE: DC SOCKET			
.XX±0.25	.X*± 1	CHK.	Jack	DWG NO. XY-DC002-1.3			
.XXX±0.15	.XX*±	DRA.	Can	PROJ. 		CUSTOMER DRAWING	
				SIZE A4	SCALE 1:1	SHEET 1/1	REV. A