
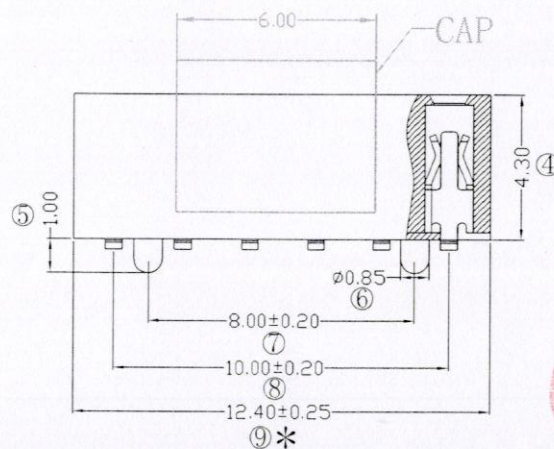


Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA9T+30%G.F UL94V-0, Color: Black
端子: 磷铜, 镍底30u"MIN, 表面镀普金
Contact: Phosphorous, GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
额定电流: 2 AMP
Raring Current: 2 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

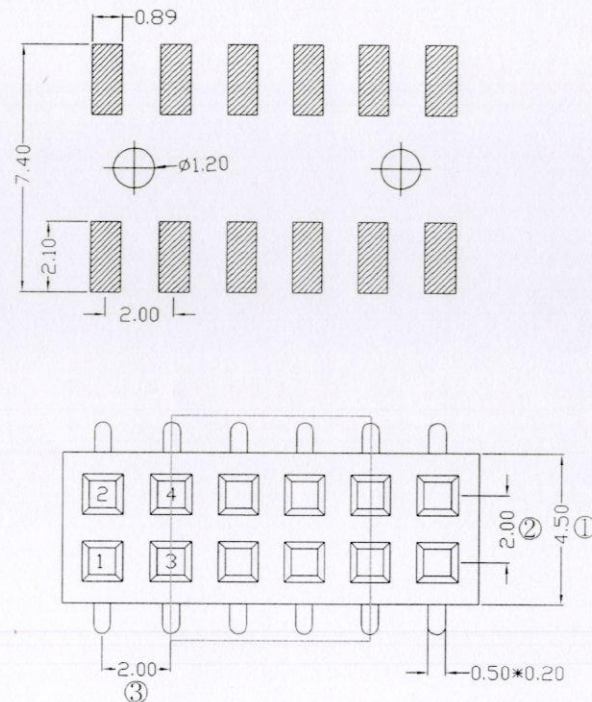


Ordering Information

F243-12 06 A0 C MU B 1

NO. OF PINS PER ROW 2-40P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
---------------------------------	---	---	--	---

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

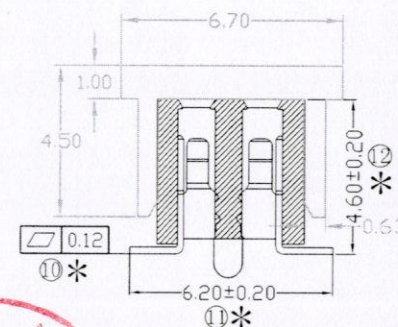

RoHS
COMPLIANT

客编: V1169

1. 带*为品质重点检验尺寸

注意事项

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司							
				X.X	±0.25	UNIT		MM		www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.							
				X.XX	±0.20	SIZE		A4		DESIGN		李官森2021.09.07		PART NO.		F243-1206A0CMUB1	
A0	2021.09.07	/	新版发行	X.XXX	±0.10	SHEET		1/1		CHECK		刘伟.9.7		TITLE:		2.0#母4.3mm塑高 2*6P SMT:6.2 带定位柱 铜钢 U型 塑宽=4.5 PA9T料 镀锌金 CAP+800/瓷	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	Angle	±3°	PROJ.				APPROVE		刘伟.9.7		Customer No.			
				DIM	TOL												

A0 2021.09.07 / 新版发行

李官森 2021.09.07 PART NO. F243-1206A0CMUB1

2. 01排母4.3mm型高 2*6P SMT:6.2 带定位柱 磷铜 U型 塑宽=4.5 PA9T料 镀普金 CAP+800/套

