



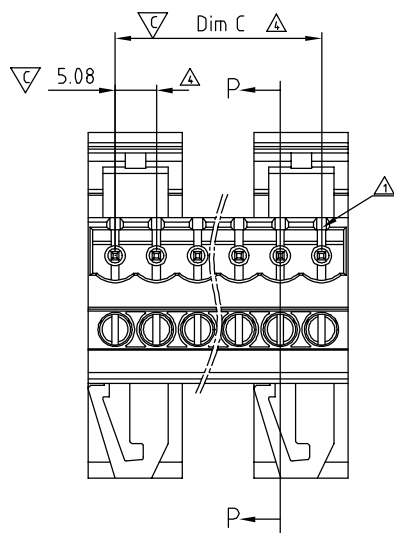


DIMENSION

Dim A	$N \times 5.08 + 1.52$
Dim B	$(N-1) \times 5.08$
Dim C	$(N-1) \times 5.08$

N= NUMBER OF CONCATS

Poles	Tolerance
2P-6P	± 0.20
7P-12P	± 0.25
13P-18P	± 0.30
19P-24P	± 0.40

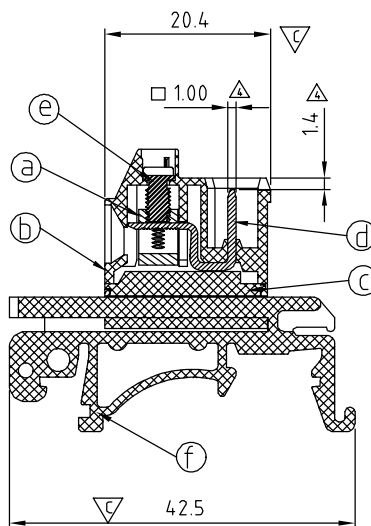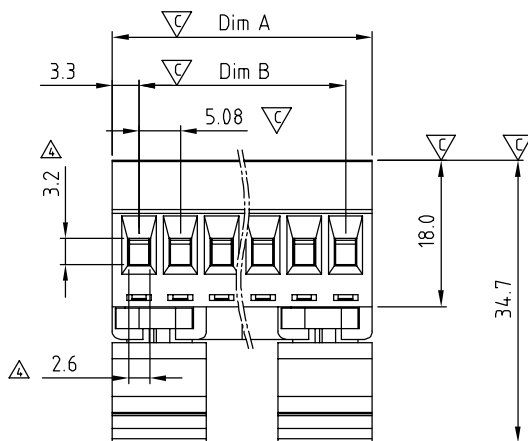

SECTION P-P

SIGN	DATE	DESCRIPTION	APPROVER
△	2010.10.11	The design is changed	Jacke
△	2011.08.18	Torque(Lb-In) is changed from 0.6 (Nm.) to 4.4(Lb-In)	Aaron
△	2011.08.18	Add is cULus	Aaron
△	2011.08.18	The dimension are added	Aaron

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Clamp: Brass Ni plated
- Item ② Terminal(housing): Thermoplastic (UL94V-0)
- Item ③ Terminal(cover): Thermoplastic (UL94V-0)
- Item ④ Contact pin : Brass,Tin plated.
- Item ⑤ Terminal screw: Steel Zinc plating solt "-type M3
- Item ⑥ Terminal(track): Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating:300V
- Current rating: 12A
- Wire range:
- Solid wire(AWG):12-30
- Stranded wire(AWG):12-30
- Torque(Lb-In): 4.4
- Screw:M3
- Wire strip length: 6-7 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: 
- Critical dimension: 

V5 xx 51 x 4 xxxx G

No. OF POLES
02 2 CONTACTS
03 3 CONTACTS
...
24 24 CONTACTS

Color
0 Black (RAL9005)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
C Green(RAL6018/U)

G: Pb<40000ppm
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request.
please contact sales

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	V5 - 5.08 Series 2P-24P (W/o Flange) Dinrail holder B type				
PART NO.	V5xx51x4xxxxG		DWG NO.	8V50002	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Aaron 2011.08.18	Jacke 2009.12.29		X. ± 0.50 X.X ± 0.30 X.XX ± 0.10 X° $\pm 1^\circ$
				UNIT: mm SCALE: NONE SHEET: 01/01 REV.: D	