
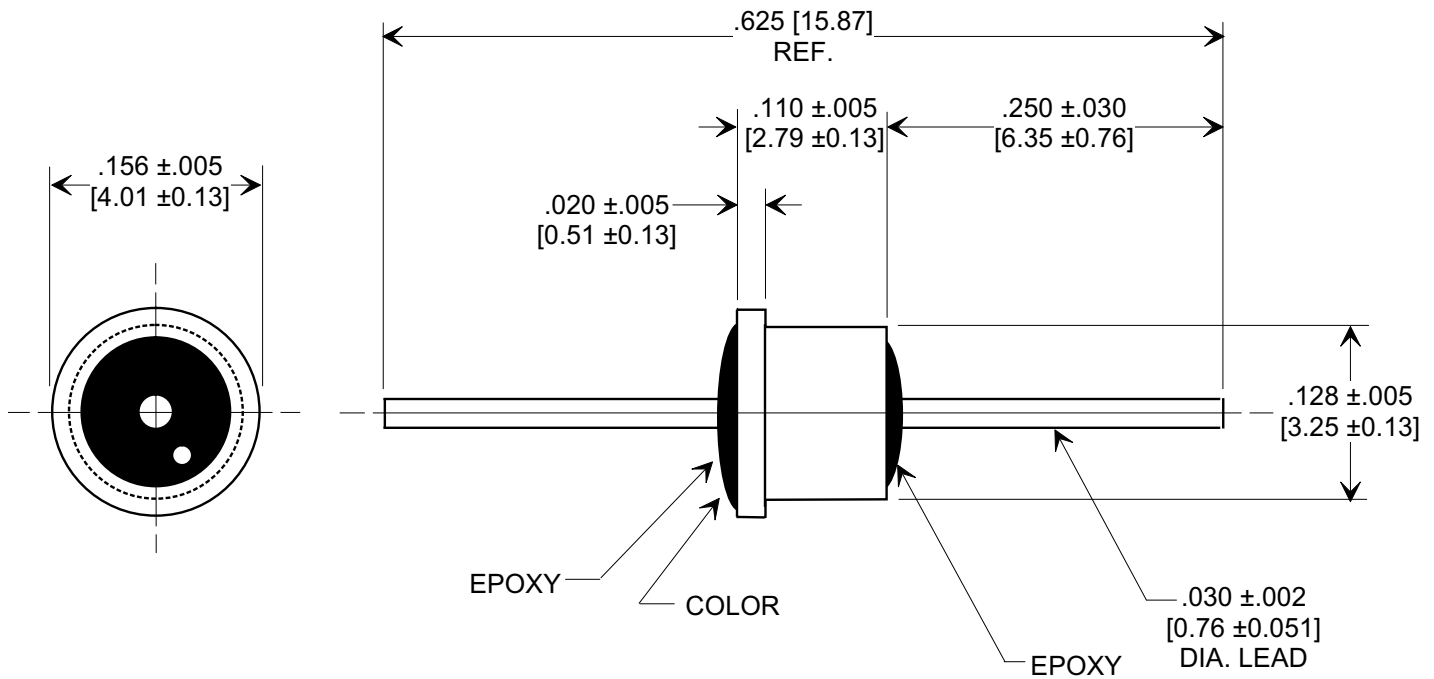



MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



NOTES:

1. Operating temperature range -55° C to +125° C.
2. Silver plated case / Gold plated lead.
3. Epoxy sealed.
4. Max. recommended soldering temperature: 260° C.
See installation recommendations.
5. Recommended mounting hole: .135 [3.43] dia.
6. Solder preform available for mounting.
7. Tusonix Standard part number: 4302-014.
Tusonix RoHS compliant part number: 4302-014 LF.
Customer must specify Standard or RoHS part number when ordering.
8. RoHS compliant part marked with additional dark green dot for identification.

Cx (pF)		TOL.	DC WORKING VOLTAGE		DC CURRENT (AMPS)	DWV (VDC)	I.R. MIN. @ 100 (VDC.)	MIN. NO LOAD INSERTION LOSS (dB) @ 25° C PER MIL-STD-220					COLOR CODE
			85°C	125°C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz	
50,000		GMV	50	50	5	100	10 G	15	35	45	70	----	BLUE/BLUE

REVISION RECORD Original Release C.O. 20030108-1-01 ADDED NOTES 7 & 8. S.M. 05-31-05 20050513-4-16	0		1	--TOLERANCES-- Unless Otherwise Specified	Title SOLDER MOUNT EMI FILTER	
				DECIMAL ±		
				ANGLES ±	Drawn S.M. 01-08-03	Scale 7 X
				TUSONIX TUCSON, ARIZONA	Approved T.C. 01-08-03	
				A	4302-014	