

129V-5.08/产 品 基 本 参 数

安倍:20A 电压:300V 线径:0.5-2.5mm²

胶壳: 尼龙66工程塑料, UL 94V-0阻燃等级




温度: 110° C (UL), -40° C to T110° C (IEC)

触点材料: 黄铜 (HPb59-3), 镀镍


脚子: 黄铜 (H65) 环保

推荐剥线长度: 7-8mm

接线位数: 2位-24位

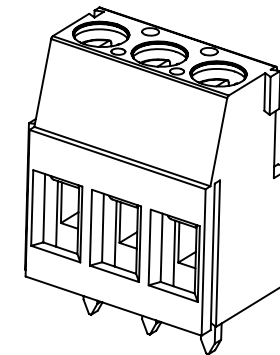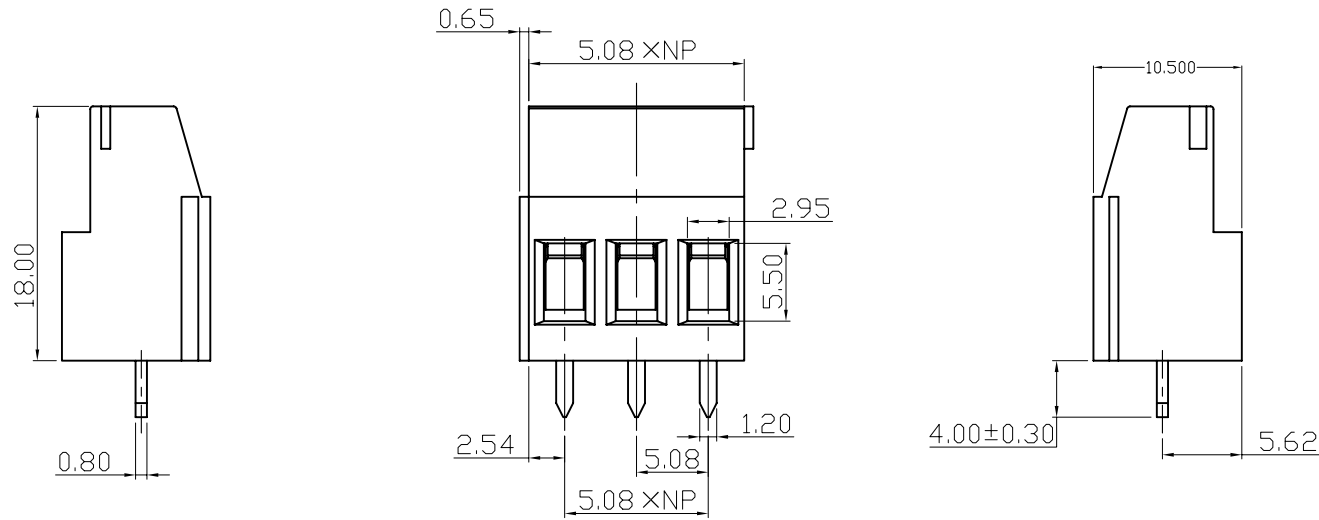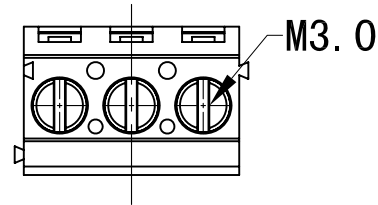

PCB LAYOUT

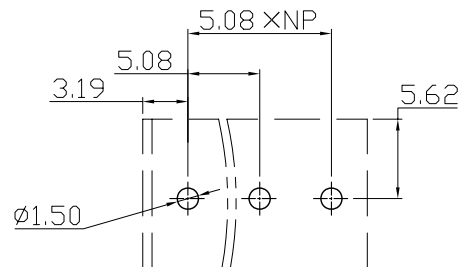

		new		2015/5/3	A	瀚源
ECN BO.		DESCRIPTION.		DATE.	REV.	
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER	SCALT: 1/2		SCALE: 3:1
Mikey	Tom	Jerry	PART NAME	HY129-5.08-XXP	UNLESS OTHERWISE SPECIFIED, TOLERANCE:	X. ±0.25
			MODEL NAME	HY129-5.08-XXP		X.x ±0.20
			3RD ANGLE PROJ	HanElectricity Co.,LTD		X.xx ±0.15
						ANGULAR ±3°
FILE.NO.						