


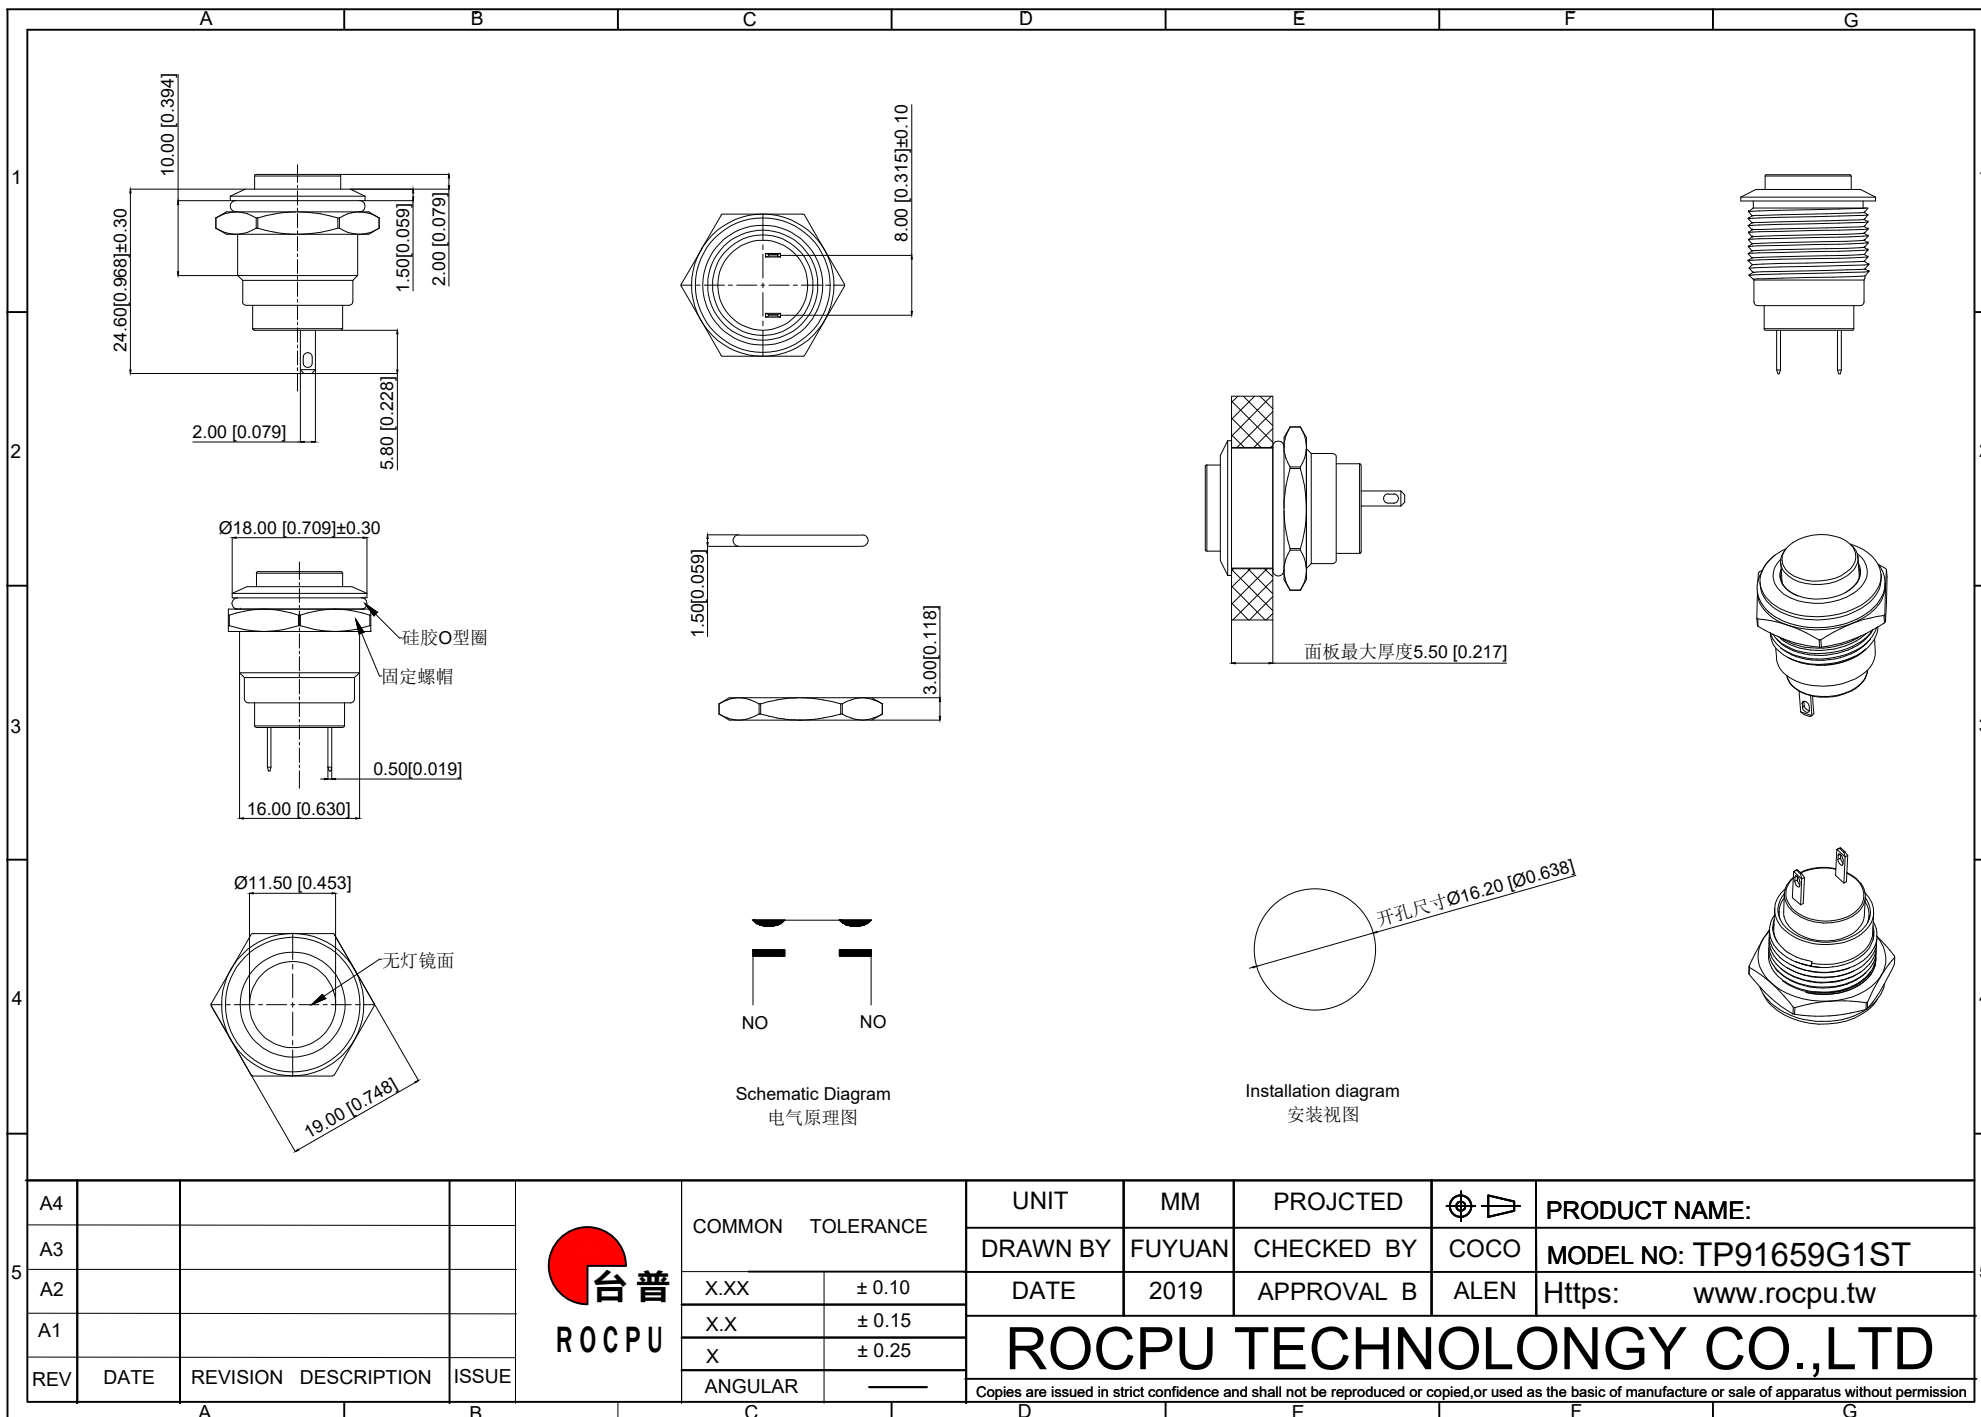

A		B		C		D		E		F		G	
性能参数													
1. Heating current: Ui: AC250V, Ith: 3A 发热电流: Ui: AC250V, Ith: 3A													
2. Rated current:2A/DC36V 额定电流:2A/DC36V													
3. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ													
4. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ													
5. Pressing stroke:2.50mm ± 0.10 按压行程:2.50mm ± 0.10													
6. Contact stroke:1.10mm±0.10 接触行程 :1.10mm±0.10													
7. Nut assembly torque:5-14N 螺帽装配力矩:5-14N													
8. Protection level:IP67 防护等级:IP67													
9. Explosion prevention level: IK09 防暴等级: IK09													
10. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃													
11. Compression torque: ≤ 3N 按压扭力: ≤3N													
12. Electrical life: 1000000 cycles 电气寿命: 1000000 cycles													
13. mechanical: 500000cycles 机械寿命: 500000cycles													
14. Operation method:Self-locking 操作方式: 自锁式													
15. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N													

A		B		C		D		E		F		G	
材质参数													
7		Base 基座		PA66		1		light blue 浅蓝色					
6		Pin 引脚		Brass 黄铜		1		gold-plating 镀金					
5		Contact material 接触材质		Silvering 镀银		1							
4		Arm nut 固定螺帽		Brass 黄铜		1		nickeling 镀镍					
3		Oring O型圈		Silica gel 硅胶		1							
2		Housing 外壳		SUS 不锈钢		1		Titanium plating 镀钛					
1		Key 按键		SUS 不锈钢		1		Titanium plating 镀钛					
NO 序号		Part name 部件名		Material 材料		QTY 数量		Remark 备注					

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91659G1ST
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE						
					ANGULAR	—	Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission				