



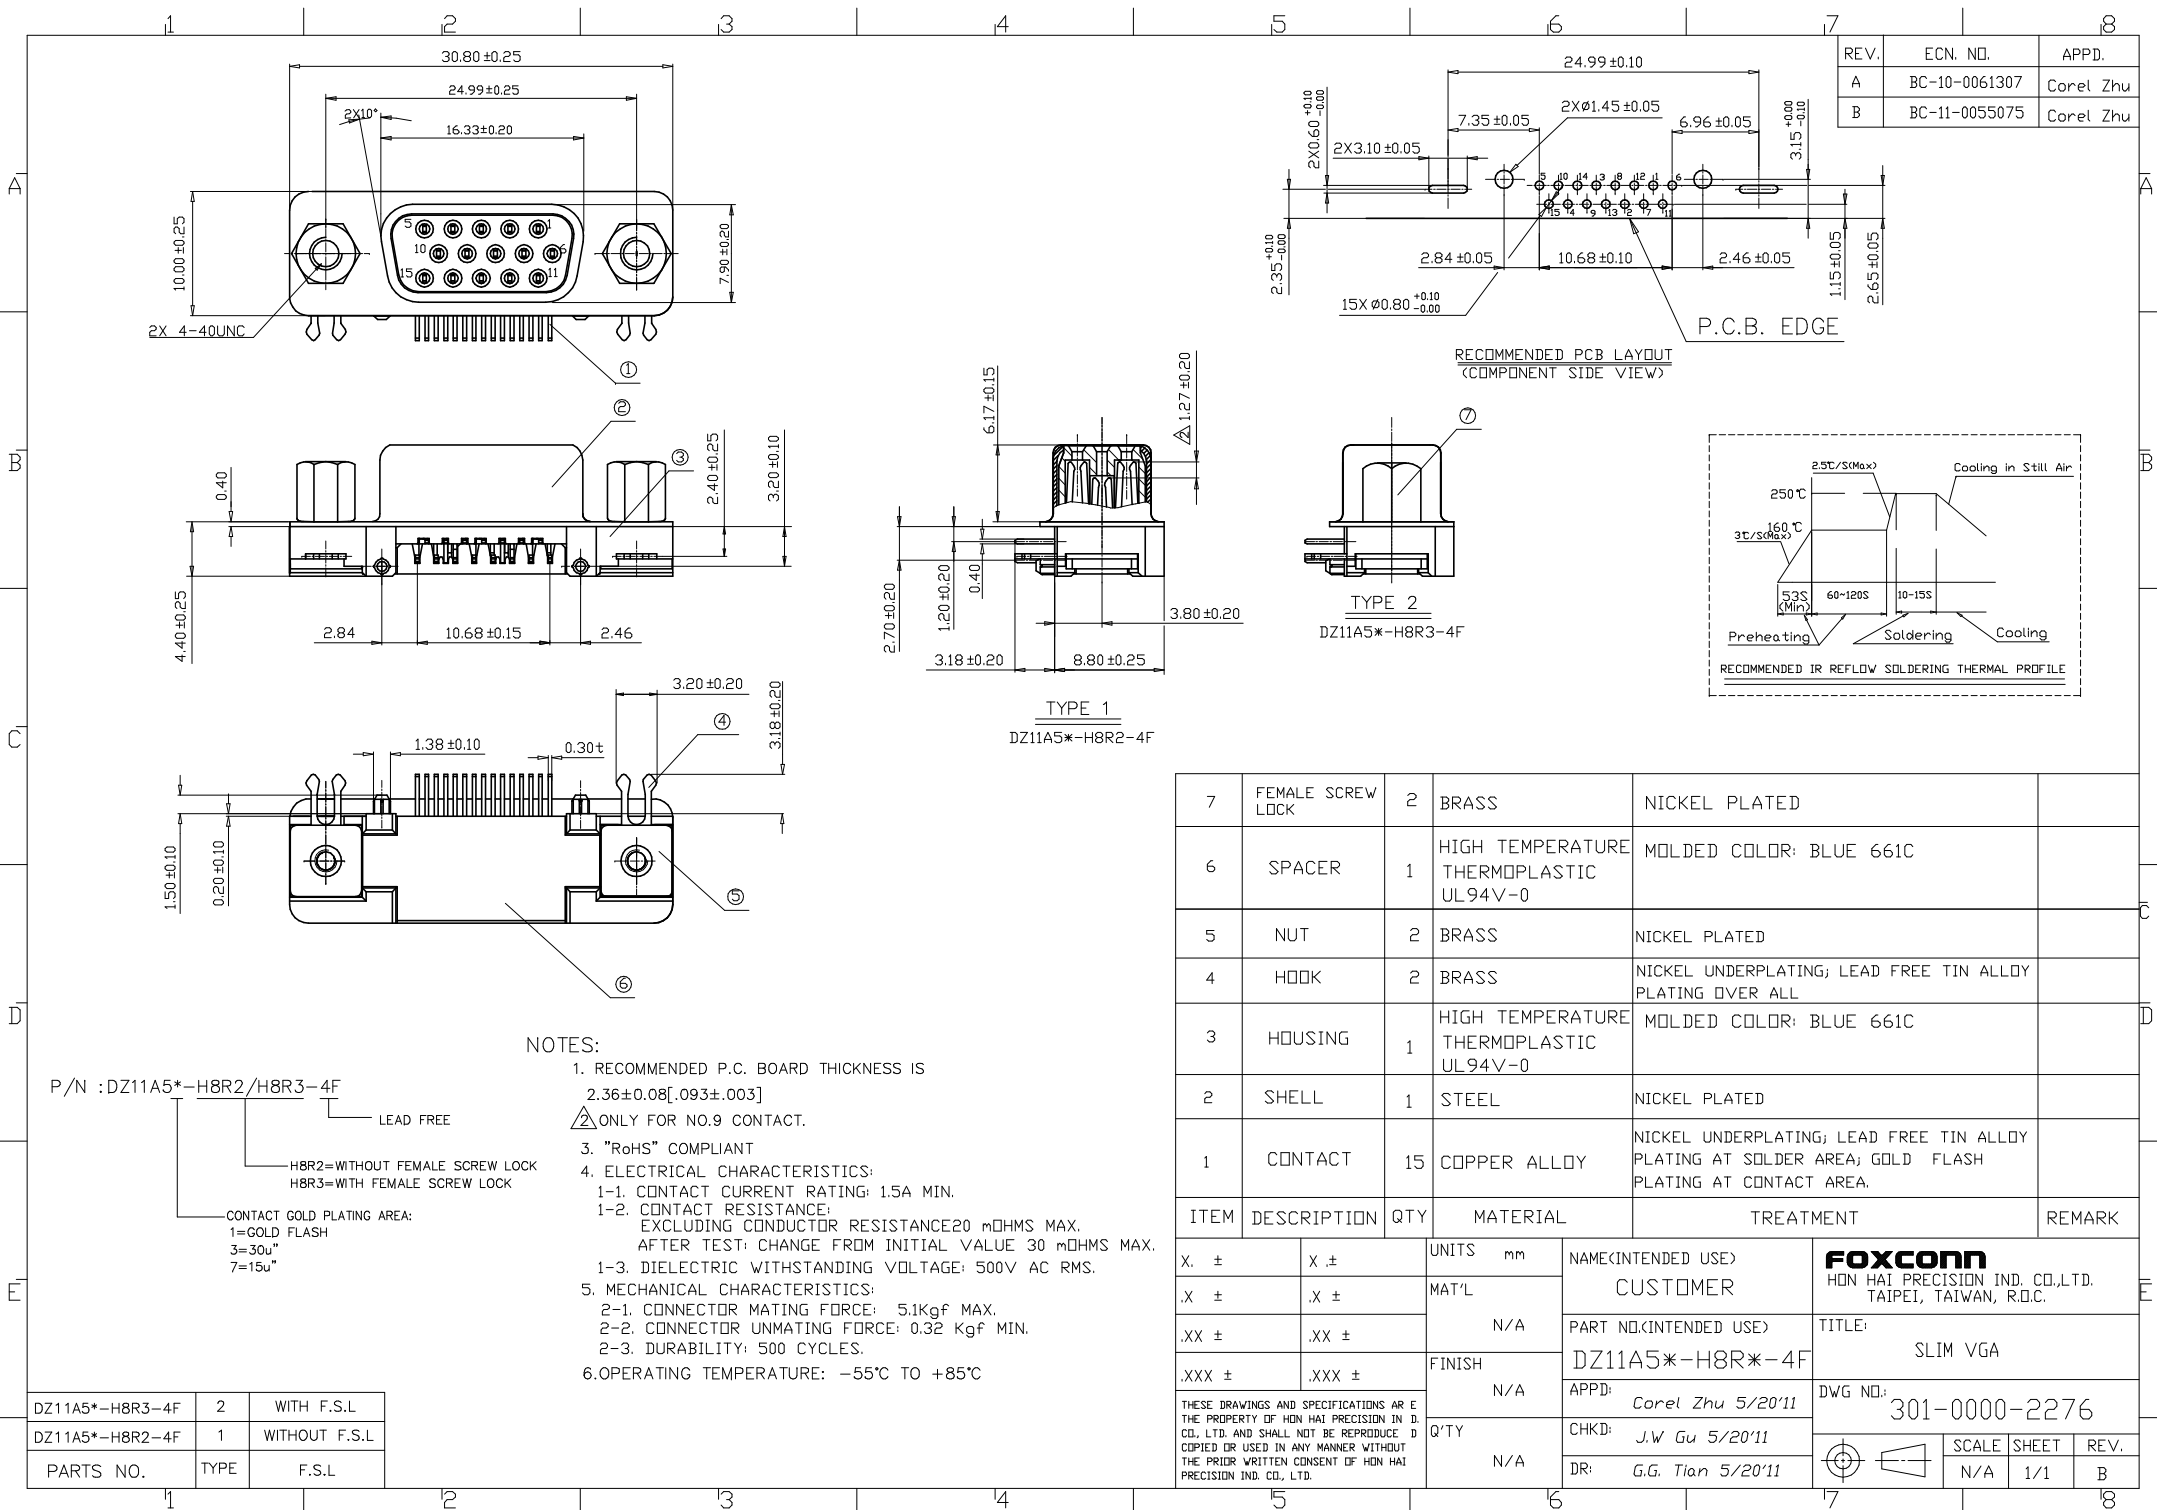

REV.	ECN. NO.	APPD.
A	BC-10-0061307	Corel Zhu
B	BC-11-0055075	Corel Zhu

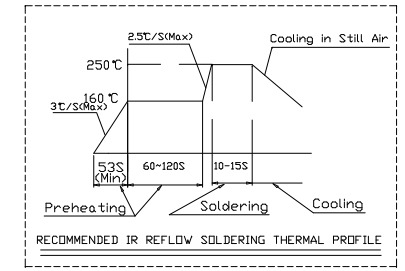

7	FEMALE SCREW LOCK	2	BRASS	NICKEL PLATED		
6	SPACER	1	HIGH TEMPERATURE THERMOPLASTIC UL94V-0	MOLDED COLOR: BLUE 661C		
5	NUT	2	BRASS	NICKEL PLATED		
4	HOOK	2	BRASS	NICKEL UNDERPLATING; LEAD FREE TIN ALLOY PLATING OVER ALL		
3	HOUSING	1	HIGH TEMPERATURE THERMOPLASTIC UL94V-0	MOLDED COLOR: BLUE 661C		
2	SHELL	1	STEEL	NICKEL PLATED		
1	CONTACT	15	COPPER ALLOY	NICKEL UNDERPLATING; LEAD FREE TIN ALLOY PLATING AT SOLDER AREA; GOLD FLASH PLATING AT CONTACT AREA.		
ITEM		DESCRIPTION	QTY	MATERIAL	TREATMENT	REMARK
X. ±		X. ±	UNITS	mm	NAME(INTENDED USE)	
.X ±		.X ±	MAT'L		CUSTOMER	
.XX ±		.XX ±		N/A	PART NO.(INTENDED USE)	
.XXX ±		.XXX ±	FINISH		DZ11A5*-H8R*-4F	
				N/A	APPD: Corel Zhu 5/20'11	
			Q'TY		CHKD: J.W Gu 5/20'11	
				N/A	DR: G.G. Tian 5/20'11	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCE, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSEN OF HON HAI PRECISION IND. CO., LTD.						
FOXCONN HON HAI PRECISION IND. CO.,LTD. TAIPEI, TAIWAN, R.O.C.						
TITLE: SLIM VGA						
DWG NO: 301-0000-2276						
		SCALE	SHEET	REV.		
		N/A	1/1	B		

- NOTES:
1. RECOMMENDED P.C. BOARD THICKNESS IS 2.36±0.08[.093±.003]
 2. ONLY FOR NO.9 CONTACT.
 3. "RoHS" COMPLIANT
 4. ELECTRICAL CHARACTERISTICS:
1-1. CONTACT CURRENT RATING: 1.5A MIN.
1-2. CONTACT RESISTANCE:
EXCLUDING CONDUCTOR RESISTANCE 20 mOHMS MAX.
AFTER TEST: CHANGE FROM INITIAL VALUE 30 mOHMS MAX.
1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC RMS.
 5. MECHANICAL CHARACTERISTICS:
2-1. CONNECTOR MATING FORCE: 5.1KgF MAX.
2-2. CONNECTOR UNMATING FORCE: 0.32 KgF MIN.
2-3. DURABILITY: 500 CYCLES.
 6. OPERATING TEMPERATURE: -55°C TO +85°C

P/N :DZ11A5*-H8R2/H8R3-4F

LEAD FREE

H8R2=WITHOUT FEMALE SCREW LOCK
H8R3=WITH FEMALE SCREW LOCK

CONTACT GOLD PLATING AREA:
1=GOLD FLASH
3=30u"
7=15u"

DZ11A5*-H8R3-4F	2	WITH F.S.L
DZ11A5*-H8R2-4F	1	WITHOUT F.S.L
PARTS NO.	TYPE	F.S.L