
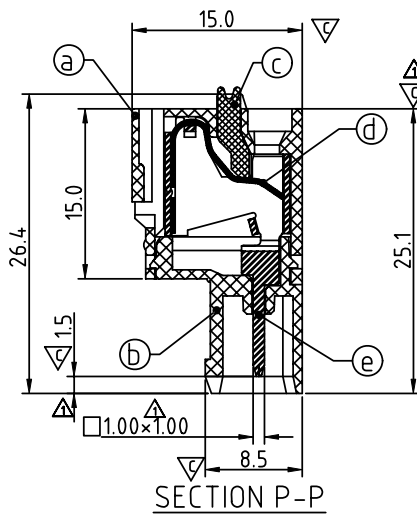
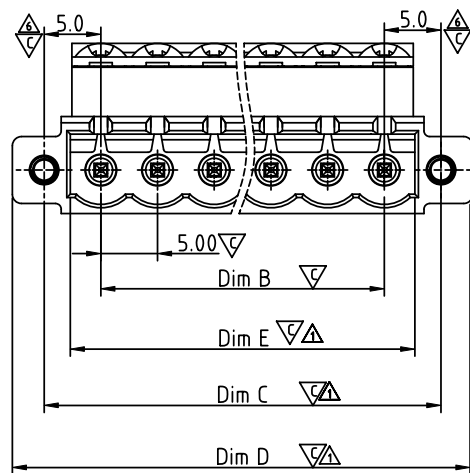
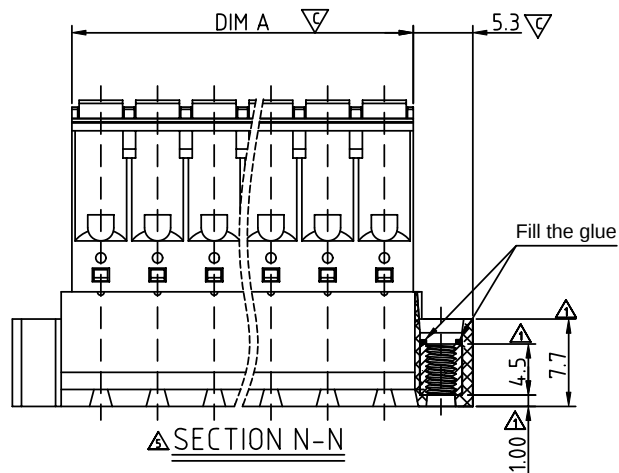


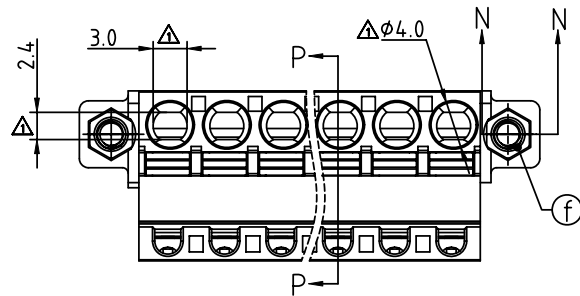

Dimension

|       |            |
|-------|------------|
| DIM A | N×5.0+0.10 |
| DIM B | (N-1)×5.0  |
| DIM C | (N+1)×5.0  |
| DIM D | N×5.0+10.6 |
| DIM E | N×5.0+0.4  |

N=Number of poles

| POLES   | TOL   |
|---------|-------|
| 2p-6p   | ±0.15 |
| 7p-12p  | ±0.20 |
| 13p-16p | ±0.30 |
| 17p-24p | ±0.40 |

| SIGN | DATE     | DESCRIPTION                          | APPROVER |
|------|----------|--------------------------------------|----------|
| △    | 06/22'13 | Add the dimensional label            | Jacky    |
| △    | 06/22'13 | Add the teminal lever colour         | Jacky    |
| △    | 06/22'13 | Add the colour code                  | Jacky    |
| △    | 06/22'13 | Change the drawing number            | Jacky    |
| △    | 06/22'13 | Add the view                         | Jacky    |
| △    | 06/28'13 | Change the dimension from 5.2 to 5.0 | Jacky    |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

### Material

- Item a Terminal body:Thermoplastic (UL94V-0)
- Item b Terminal body:Thermoplastic (UL94V-0)
- Item c Terminal lever:Thermoplastic (UL94V-0)Orange△
- Item d Wire guard:Stainless Steel
- Item e Male contacta pin:PhBz (CuSn) Tin plated
- Item f With flange Nut; Brass M2.5

### Electrical

- Voltage rating: 300V
- Current rating: 10A
- Solid wire(AWG): 12-26
- Stranded wire(AWG): 12-26
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: CE, RoHS
- Critical dimension: △

H5 xx 70 x 2 xxxx G

02 2 CONTACTS  
03 3 CONTACTS  
... ..  
24 24 CONTACTS

0: BLACK  
5: GREEN (RAL 6018/T)  
6: BLUE  
8: GREY (RAL 7035/D)  
△C: GREEN (RAL 6018/U)

0000 Standard @ Logo  
000A Standard ANY Logo  
Any special item by  
customer request,  
please contact sales  
department.

RoHS compliant  
(lead<4%)  
In copper Alloy

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |                                          |                     |                     |                                                                                       |             |            |
|----------|------------------------------------------|---------------------|---------------------|---------------------------------------------------------------------------------------|-------------|------------|
| TITLE    | H5 5.0 Series ( 2P-24P ) Flange with Nut |                     |                     |                                                                                       |             |            |
| PART NO. | H5xx70x2xxxxG                            |                     |                     | DWG NO.                                                                               | 8H50303△    |            |
| APPROVED | CHECKED                                  | DESIGNED            | DRAWN               | CUST NO.                                                                              | Tolerance   |            |
|          |                                          | Jacky<br>2013.06.28 | Jacky<br>2013.06.28 |  | UNIT: mm    | X. ±0.50   |
|          |                                          |                     |                     |                                                                                       | SCALE: NONE | X.X ±0.30  |
|          |                                          |                     |                     | SHEET: 01/01                                                                          | REV: C      | X.XX ±0.10 |
|          |                                          |                     |                     |                                                                                       |             | X* ±1*     |