
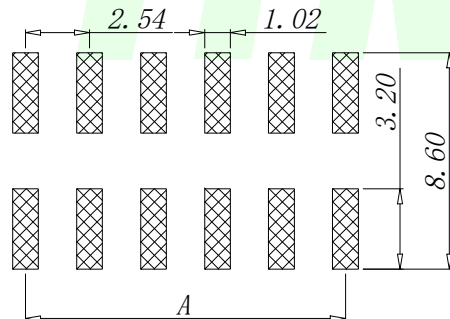
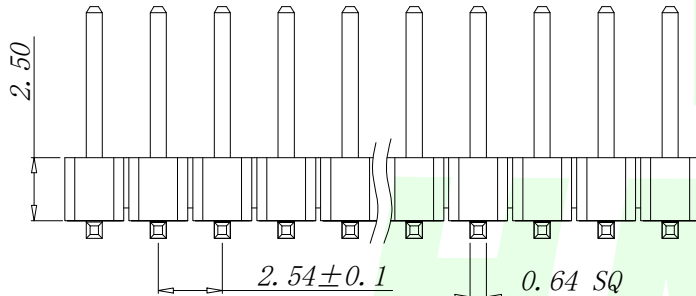


RoHs


SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PA6T
Insrlator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for 30-60seconds
(260°C for 5seconds)

VER	MARK	PR. BY	DESCRIPTION	DATE

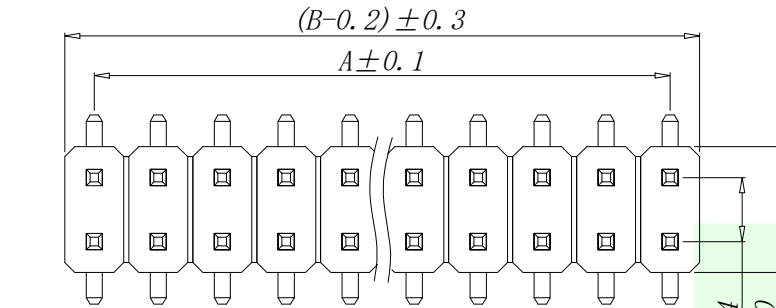

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

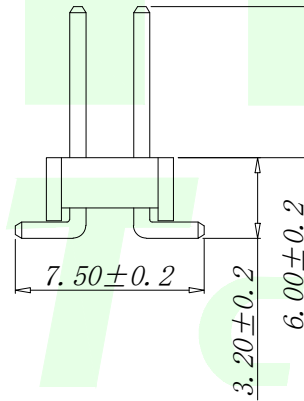

P/N	PIN	DIM. A	DIM. B
A25410530-2PB2111-H25C75	2*1	0.00	2.54
A25410530-4PB2111-H25C75	2*2	2.54	5.08
A25410530-6PB2111-H25C75	2*3	5.08	7.62
A25410530-8PB2111-H25C75	2*4	7.62	10.16
A25410530-10PB2111-H25C75	2*5	10.16	12.70
A25410530-12PB2111-H25C75	2*6	12.70	15.24
A25410530-14PB2111-H25C75	2*7	15.24	17.78
A25410530-16PB2111-H25C75	2*8	17.78	20.32
A25410530-18PB2111-H25C75	2*9	20.32	22.86
.....			
A25410530-80PB2111-H25C75	2*40	(PIN-1)X2.54	(PIN)X2.54

GENERAL TOLERANCES
UNLESS SPECIFIED

X.° ±0.30	X.° ±5°
X.X° ±0.20	X.X° ±1°
X.XX° ±0.10	X.XX° ±0.5°

MANUFACTURE DWG



深圳市华明通电子有限公司
Shenzhen Huamingtong Electronics Co., Ltd

PART NO.	A25410530-XPB2111-H25C75
DESIGN:	James
CHED:	Talen
APPD:	Sophia

5	TITLE: 2.54PH H2.5 2xnPin SMT PC7.5 PA6.0 PB3.2 L11.0 6T	
	CUSTOMER	SIZE A4
	UNITS MM	
	SCALE N:A	SHEET 1 / 1