


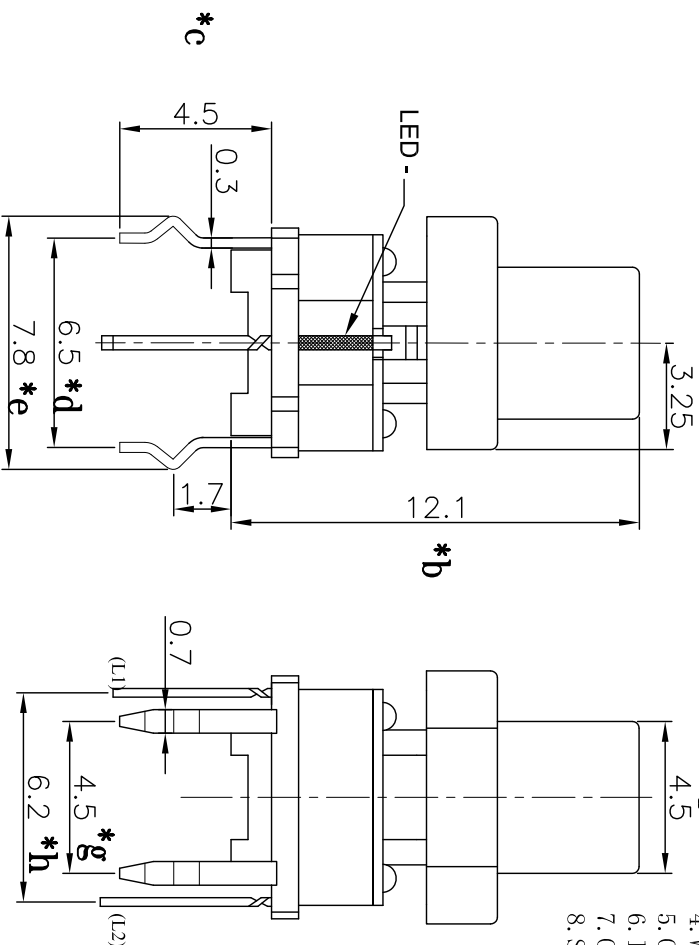


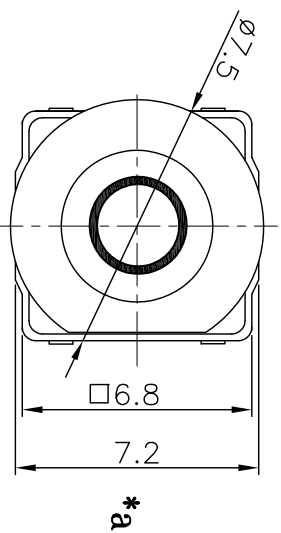

LED COLOR					
1	2	3	4	5	6
Red	Yellow	Green	Blue	White	Pure Green

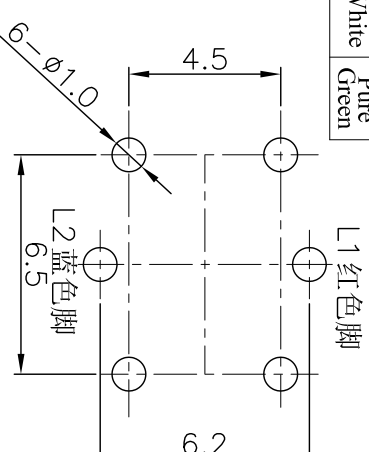

P.C.B.Layout

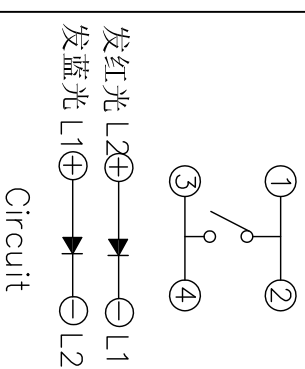

SPECIFICATION

1. Rating : DC12V 50mA.
2. Contact resistance: $\leq 100\text{m}\Omega$.
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V)
4. Withstanding voltage: 250VAC .
5. Operating Force: $160 \pm 50\text{gf}/250 \pm 80\text{gf}$
6. life test: 10,000 cycles.
7. Operation temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
8. Sign "*" is importance dimension.

					TOLERANCE									
					UNLESS SPECIFIED									
7	COVER 2	PC	1											
6	COVER 1	PET	1		UP TO 5mm:±0.1		ANGULAR	A0	2024.6.21	首次发行			YKH	
5	TERMINAL	PHOSPHOR BRONZE	4	AG-PLATED	ABOVE 5mm:±0.2		±1°	NO	DATE	REVISIONS			BY	APPD
4	CONTACT	PHOSPHOR BRONZE	1		TITLE: TACT SWITCH				UNIT : MM	ROHS			DWN	
3	LED	GaAsP/GaP	1		MODEL: TC-1193-RL-E-C5A-01				SCALE: 1:1	COMPLIANT			CHK'D	
2	BUTTOM	PA66	1										APPD	
1	HOUSING	PA66	1											
NO.	PART	NAME		QTY	FINISHING							PRO.AGI:		REV :A