

Features

- rugged uni-body construction, small size
- 7 sections
- excellent power handling, 10W
- temperature stable
- low cost

Applications

- harmonic rejection
- transmitters/receivers
- lab use

Electrical Specifications at 25°C

PASSBAND (MHz) (loss < 1.2 dB) max.	fco, MHz Nom. (loss 3 dB) Typ.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
		f 20 min.	40 typ.	fr 20 max.	Stopband Typ.	Passband Typ.	
DC~1800	2125	2425	2500-7200	8600	20	1.2	7

* Not for use with DC voltage at input and output ports


Typical Performance Data

(TEST CONDITIONS: INPUT POWER = 0dBm @ Temperature = +25°C)

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	0.05	1.02
500	0.19	1.08
1800	0.85	1.15
2000	1.47	1.24
2150	3.50	2.38
2180	6.02	3.95
2260	12.64	8.47
2350	24.51	14.87
2425	35.98	18.70
2500	31.35	21.20
3500	34.91	37.77
5000	55.54	40.41
7200	34.68	42.38
8600	21.81	46.96
9000	21.33	34.07



Outline Drawing

Outline Drawing

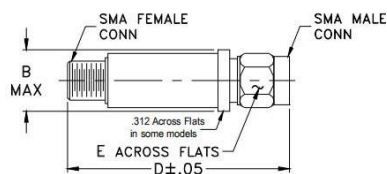

Outline Dimensions: Unit (mm)

B	10.41	E	7.92
D	36.32		
wt	10.0		

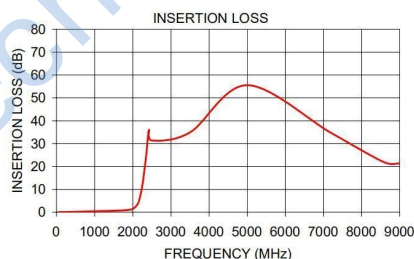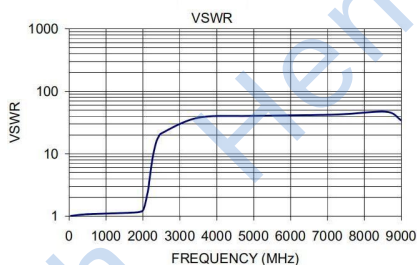

HT-VLF-1800+




50Ω *DC to 1800 MHz

electrical schematic



typical frequency response



Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input* 10W max. at 25°C

* Passband rating, derate linearly to 3.5W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.