


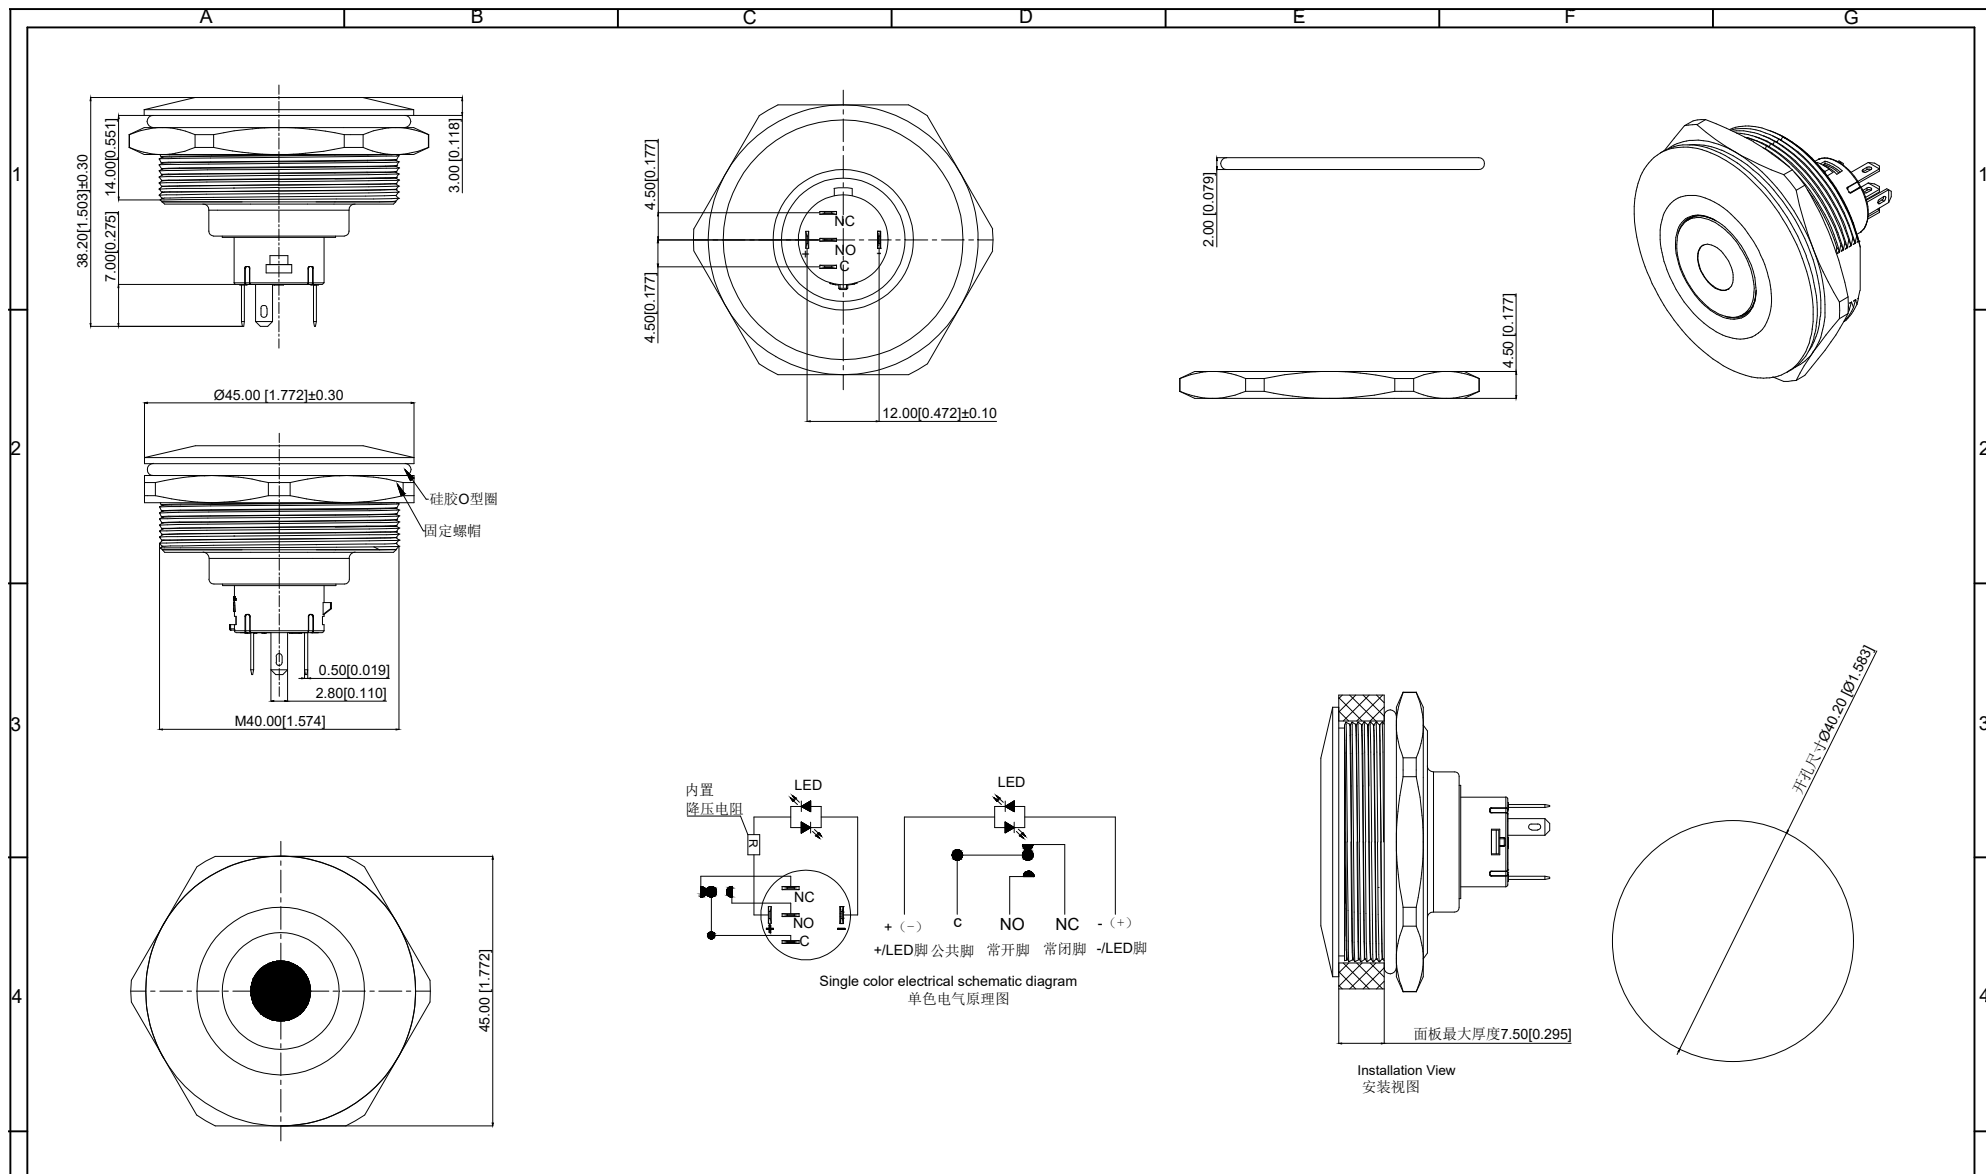

A4				 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP94005P224RA
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE	X					
					ANGULAR	_____	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				
A		B		C		D	E	F		G	

	A	B	C	D	E	F	G				
性能参数											
1	1. Heating current: Ui: AC250V, Ith: 5A 发热电流: Ui: AC250V, Ith: 5A				13. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃						
	2. Rated current:3A/DC36V 额定电流:3A/DC36V				14. Compression torque: ≤ 2.5N 按压扭力: ≤2.5N						
	3. Power-frequency withstand voltage:2000V/1min 工频耐压:2000V/1min				15. Electrical life: 50,000 cycles 电气寿命: 50,000 cycles						
	4. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ				16. Mechanical: 500, 000cycles 机械寿命: 500,000cycles						
	5. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ				17. Operation method:self repeating form 操作方式: 自复式						
2	6. Pressing stroke:2.50mm ± 0.10 按压行程:2.50mm ± 0.10				18. LED lamp power consumption: 20mA以下 LED灯功耗: 20mA以下						
	7. Contact stroke:1.50mm±0.10 接触行程 :1.50mm±0.10				19. LED lamp lifespan: 40000h LED寿命: 40000h						
	8. welding temperature: 320 ℃± 20 ℃ 焊接温度: 320 ℃± 20 ℃				20. LED color: Red LED颜色: 红色						
	9. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration				21. LED Lamp Voltage: 24V LED灯电压: 24V						
	10. Nut assembly torque:5-14N.m 螺帽装配力矩:5-14N.m				22. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N						
	11. Protection level:IP67 防护等级:IP67										
3	12. Explosion prevention level: IK10 防暴等级: IK10										
连接形式											
	1. Welding temperature of wire: 320 ± 20 ℃ 线材焊接温度: 320±20℃ Wire welding duration: less than 3 seconds 线材焊接时长: 时长3秒以下										
	2. Can be used with dedicated connectors: 可配专用接插件使用:										
	2.1 Switch function wire: Green Line (C) Blue Line (NO) Yellow Line (NC) 开关功能线材: 绿线 (C) 蓝线 (NO) 黄线 (NC)										
	2.2 LED functional wire: red wire positive pole black wire negative pole LED功能线材: 红线正极 黑线负极										
	2.3 LED is an electrodeless lamp bead that can be lit without the need to separate positive and negative poles LED为无极灯珠, 无需分正负极也可点亮										
5	A4			 台普 ROCpu	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
	A3						DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP94005P224RA
	A2				X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
	A1				X.X	± 0.15	ROCpu TECHNOLOGY CO.,LTD				
	REV	DATE	REVISION DESCRIPTION	ISSUE	X	± 0.25					
					ANGULAR	—	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission				
	A	B	C	D	E	F	F	G			

		A			B			C			D			E			F			G
材质参数																				
1		9	luminous zone 发光区			PC 塑胶			1											
		8	LEDpin LED引脚			Brass 黄铜			1			Silvering 镀银								
		7	Base 底座			PA46			1											
		6	NOPin NO引脚			Brass 黄铜			1			gold-plating 镀金								
2		5	Contact material 接触材质			silver alloy 银合金			1			Silvering 镀银								
		4	Arm nut 固定螺帽			Brass 黄铜			1			nickeling 镀镍								
		3	Oring O型圈			Silica gel 硅胶			1											
3		2	Housing 外壳			Aluminum alloy 铝合金			1			Oxidized black 氧化黑								
		1	Key 按键			Aluminum alloy 铝合金			1			Oxidized black 氧化黑								
		NO 序号		Part name 部件名			Material 材料			QTY 数量			Remark 备注							
4																				

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:			
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP94005P224RA			
A2						X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw		
A1						X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD						
REV	DATE	REVISION	DESCRIPTION		ISSUE	X	± 0.25							
					ANGULAR	——	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission							

		A			B			C			D			E			F			G
--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---