
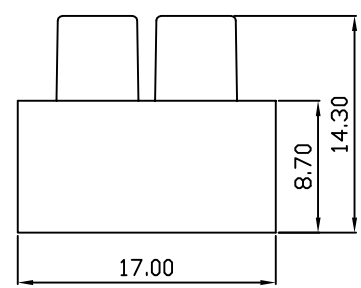
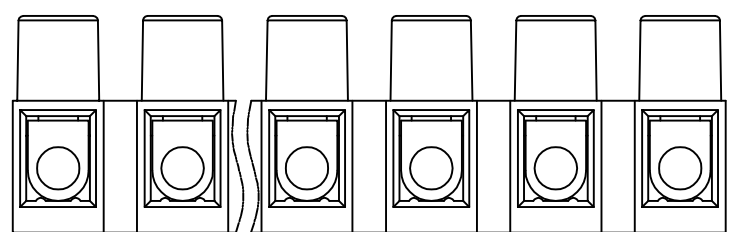


未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

REV	ECN	DESCRIPTION	DRFT	DATE

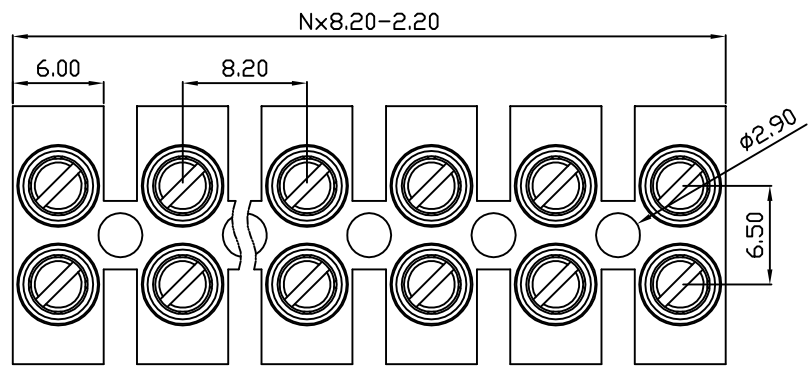

DB8H — 8.2 — XXP — C — S — ECO
 (Series No.) (Pitch) (Poles) Slotted (Economic)
 (Color):GN:(Green), BK:(Black), BU:(Blue), RD:(Red), GY:(Gray)
 OG:(Orange), WT:(White), YL:(Yellow), CR:(Clear)

Pressure line column	Zinc alloy	Ni Plated
Screw	Steel	Zn Plated
Housing	PA66	UL94V-0
NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	/
IEC 标准/IEC Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)		450/17.5	
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2.6 0.4N.m/3.56Lb.in	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		1.5/20-12	
间距/Pitch(mm)/线数范围/Poles		8.2/01-12	
剥线长度/Stripping length(mm)		/	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MAT NO.: /	DORABO 宁波地博电气有限公司 NINGBO DORABO ELECTRICAL CO., LTD
STATUS: /	
APPD: J.Ting Chen 2025.07.17	NAME: DB8H-8.2-XXP-C-S ECO
CHKD: Duck Mao 2025.07.17	
DRFT: Steven Lu 2025.07.17	DRAWING NO.: /
SIZE: A4	TYPE: CUSTOMER_DRAWING
mm (inch)	SCALE: 1:1
	REV M1
	SHEET 1/1