
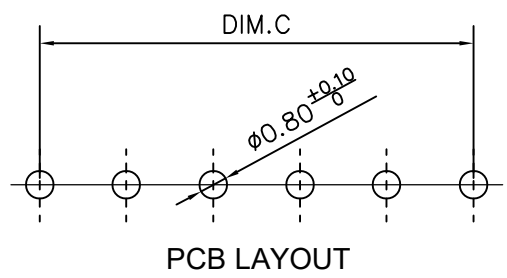
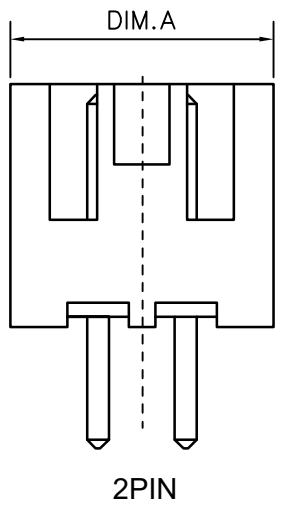
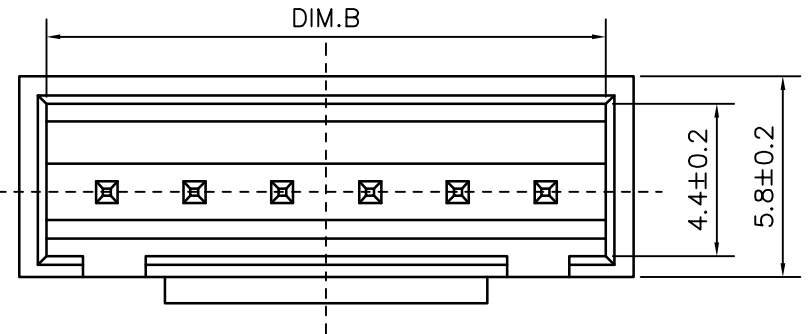
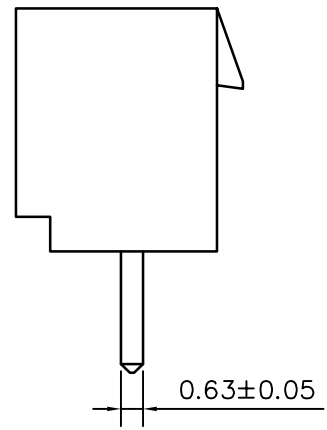


标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE

Pin	DIM A	DIM B	DIM C
2	7.50	6.10	2.50
3	10.00	8.60	5.00
4	12.50	11.10	7.50
5	15.00	13.60	10.00
6	17.50	16.10	12.50
7	20.00	18.60	15.00
8	22.50	21.10	17.50
9	25.00	23.60	20.00
10	27.50	26.10	22.50
11	30.00	28.60	25.00
12	32.50	31.10	27.50
13	35.00	33.60	30.00
14	37.50	36.10	32.50
15	40.00	38.60	35.00

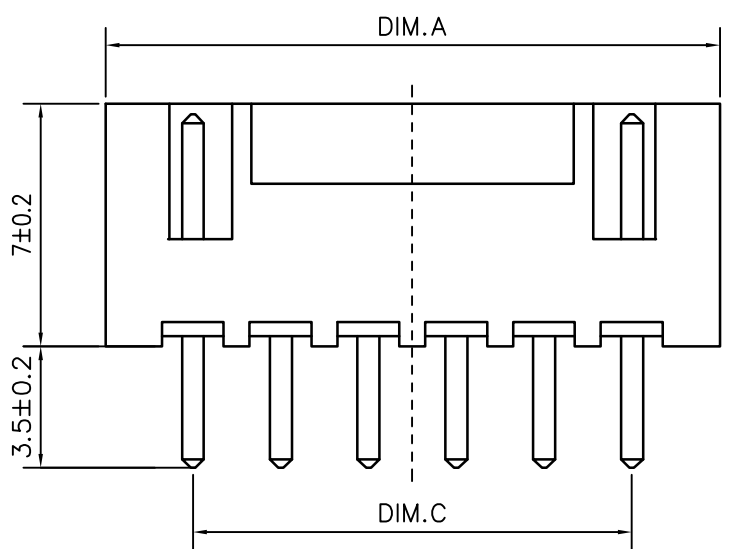

技术要求:
 适应基板厚度: 1.6mm
 温度范围: -25°C~85°C
 额定电压: 250V AC/DC
 额定电流: 3A
 接触电阻: ≤0.02Ω
 绝缘电阻: ≥1000MΩ
 耐 压: 1000V AC/minute

序号	品名	材质	电镀/颜色	备注
2	插针	铜	镀锡	
1	基座	PA66	白色	

	深圳市虹成电子有限公司 TITLE 品名 针座		料号 HC-XHB-4A-TW		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE 1:1		
X.X ±0.35 X.XX ±0.25 X.XXX ±0.15	X' ±3.00' X.X' ±2.00' X.XX' ±1.00'	单位 UNIT MM	制图 DRAW AhYe		
		张数 PART NO 1 OF 1	审核 CHECKED 夏操云	批准 APPROVE 赵亮亮	
		版本 REV A			

A
B
C
D
E
F
G

A
B
C
D
E
F
G