


Ordering Information

Temperture Range: -40°C to $+105^{\circ}\text{C}$

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact	Pin length	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
10: 1.0mm	2-40P	Ful Cr Gold	80=0.8U"	B: PA6T		A: PE Bag
15: 1.5mm		A1=1U"	B1=1U"	C: PA9T		B: Tape & Reel
20: 2.0mm		A2=1.5U"	B2=1.5U"	D: LCP		C: Tube
		A3=2U"	B3=2U"			D: Tube+CAP
		A4=3U"	B4=3U"			E: Tray
		A5=5U"	B5=5U"			
		A6=10U"	B6=10U"			
		A7=15U"	B7=15U"			
		A8=20U"	B8=20U"			
		A9=30U"	B9=30U"			
		S1=Cr di nary Ti n Pl ated				
		S2=Matte Ti n Pl ated				
		S3=Ti n-pl ated H gh-temper at ure				

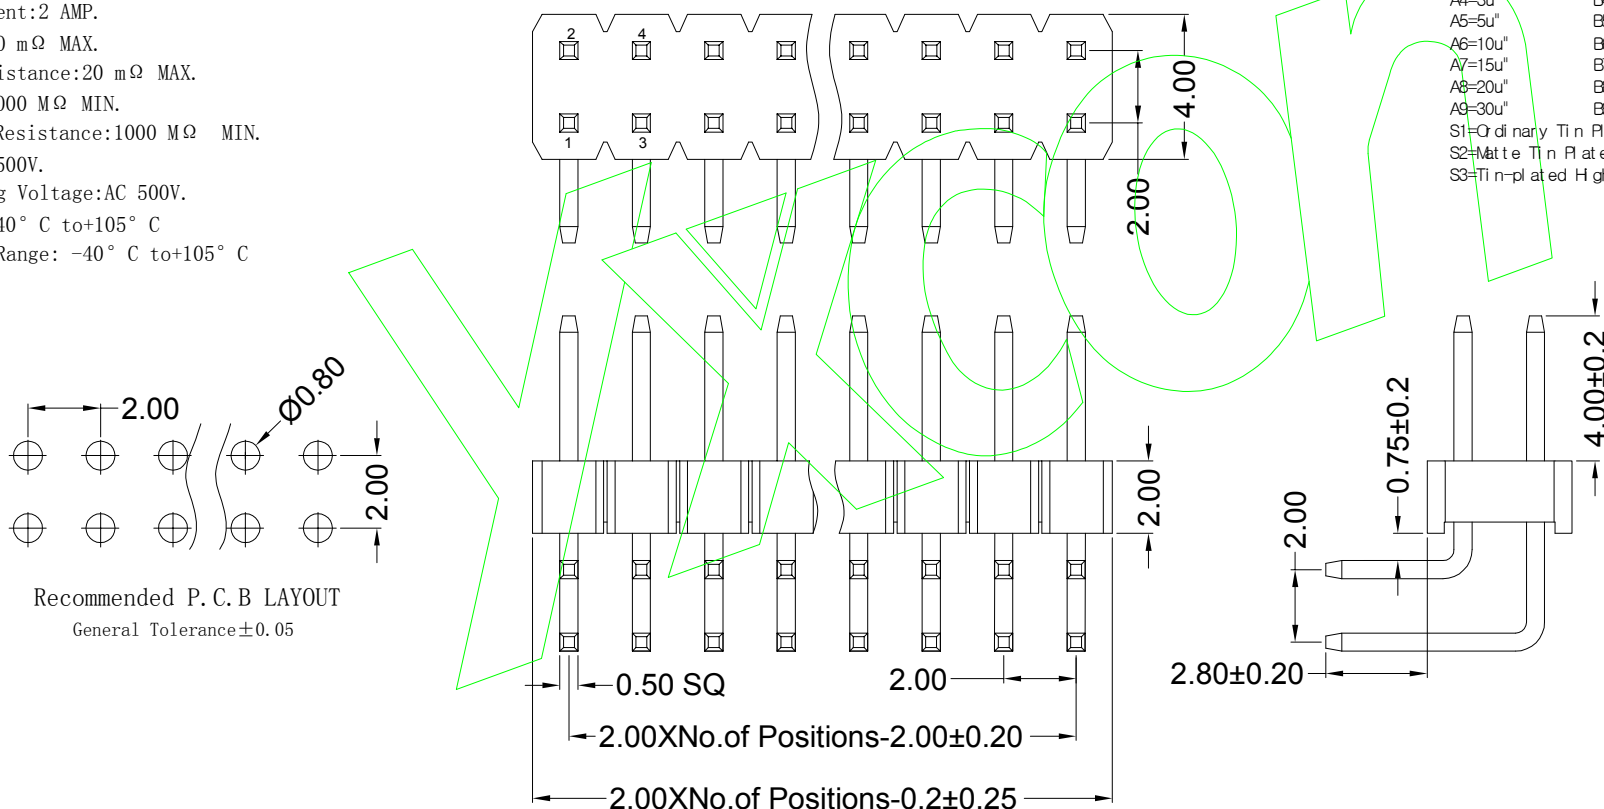

				OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	+0.25	UNIT		MM			
				X.XX	+0.20	SIZE	A4	DESIGN	赵文品 2025.03.26	PART NO	P220-12XXA0AR105A1
				X.XXX	+0.10						
				Angle	+0.3°	SHEET	1/1	CHECK		TITLE	PH2.0 2*XXP L=10.5/2.8(0.75)/4.0/14.5 90度 PA9T 镀黄金 袋装
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	