
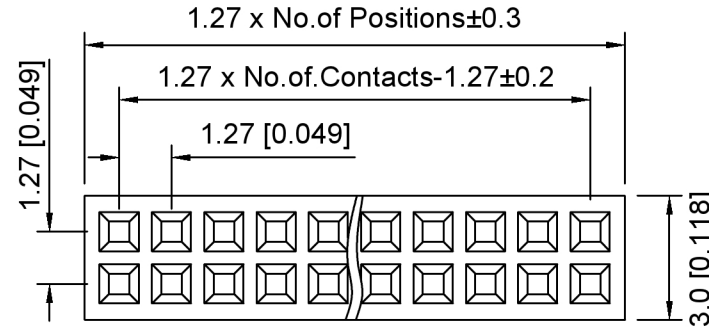
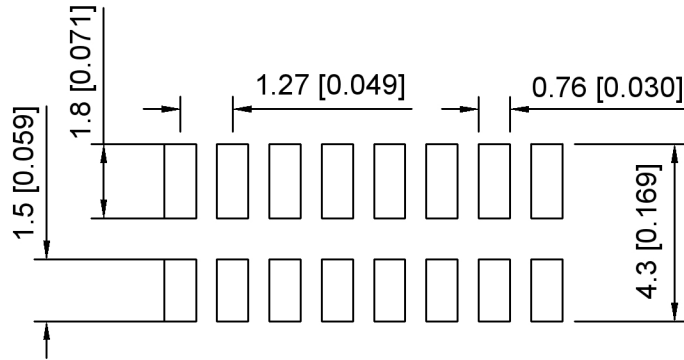
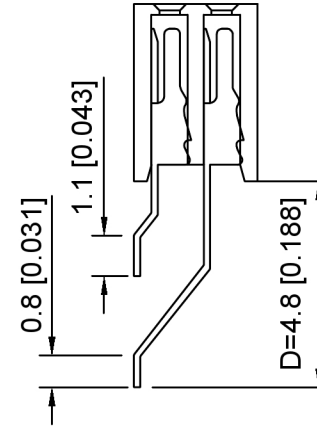


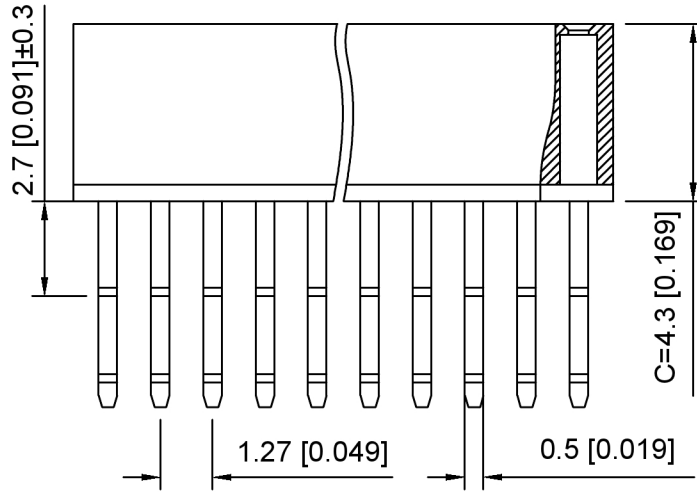

PCB LAYOUT

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:300V AC/minute

耐受电压: 300V AC/分钟

Temperature range:-40℃~+105℃

温度范围: -40℃~+105℃

Insulation resistance:≥500MΩ

绝缘电阻: ≥500MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category:1U"Gold

镀层: 1U"Gold

Reflow soldering temperature:260±5℃, 10S

回流焊温度: 260±5℃, 10S

X1321 F R S - 2xXX - C43 D48
① ② ③ ④ ⑤ ⑥ ⑦

1.Series No

2.Category:F-Female

3.Welding Board Angle:R-Stright 90°

4.Welding Way:S-SMT

5.Row No.Pin No:2xXX-2x01~2x40P

6.Plastic Height:C=4.3mm

7.Pin Length:D=4.8mm

X1321FRS-2xXX-C43D48	PA6T	Brass	X1321W
PART NO	Material	Material(Pin)	Suitable XKB Wafer

广东星坤科技股份有限公司			
Δ*		日期	
Δ*		日期	
Δ*		日期	
MARK	DESCRIPTION	DATE	REVISED
文件工程章		REVISIONS	UNSPECIFIED TOLERANCES
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn			

					ANGLAR	±5°
					L≤ 4	±0.2
					4<L≤ 16	±0.3
					16<L≤ 63	±0.4
					L> 63	±0.5
						UNSPECIFIED TOLERANCES

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

}	DSND		SCALE: N/A	MODEL TYPE: 1.27mm BTB Connector		
	DWN		VIEW: 	PART NO.: X1321FRS-2xXX-C43D48		
	CHKD		UNIT: mm/in	DWG NO.: X-X1321FRS-2xXX-C43D48		
	APPD		SIZE: A4			
PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
					1/1	A0