
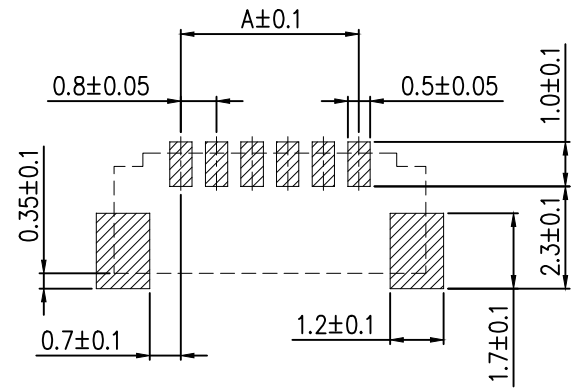

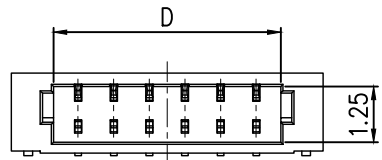






7	8	9
标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE
		日期 DATE
		核准 APPROVE

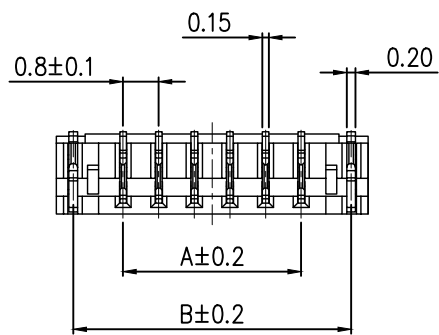

PCB Layout

PIN	尺寸 (mm)			
	A	B	C	D
02	0.80	3.04	3.80	1.90
03	1.60	3.84	4.60	2.70
04	2.40	4.64	5.40	3.50
05	3.20	5.44	6.20	4.30
06	4.00	6.24	7.00	5.10
07	4.80	7.04	7.80	5.90
08	5.60	7.84	8.60	6.70
09	6.40	8.64	9.40	7.50
10	7.20	9.44	10.2	8.30

技术要求:

- 额定电流: 0.7A AC,DC
- 额定电压: 30V AC
- 温度范围: -40° C~+85° C
- 接触电阻: ≤0.03 Ω
- 绝缘电阻: ≥100M Ω
- 耐 压: 200V AC/min

2	接触	铜	镀锡	
1	基座	LCP	米色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品名 TITLE	针座
			料号 PART NO	HC-SURO. 8-7PWT
GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1	
X.±0.30	X.±5'	单位 UNIT	MM	
.X±0.25	.X±3'	张数 PART NO	1 OF 1	制图 DRAW
.XX±0.20	.XX±1'	版本 REV	A	审核 CHECKED
				夏操云
				批准 APPROVE
				赵亮亮

