

EIS-D210

Wireless Connectivity Edge Intelligence Server

NEW

DeviceOn
iEdge



DeviceOn/iEdge

Features

- Integrated hardware plus software to build up edge-to-cloud applications
- Pre-configured system: Intel® Celeron® N3350/E3940 SoC, Win 10 Ent with 4GB Memory, 64 GB SSD and wireless networking
- Pre-integrated software package: WISE-DeviceOn, WebAccess/SCADA and iEdge for equipment connectivity
- Pre-configured Microsoft Azure service: Device Management Package/ Data Intelligence Package (Optional)
- Pre-configured AWS service: Connect & Collect Package (Optional)
- Comprehensive developer tools and documents: Node-RED data flow logic designer, dashboard builder, protocol plug-in SDK & configuration tools



Introduction

To fulfill customer requirements in equipment connectivity, data visualization, and predictive maintenance applications, Advantech offers the EIS-D210 Edge Intelligence Server, which is equipped with an Intel® Celeron® Processor N3350 and comes integrated with AWS Greengrass and Microsoft Azure IoT Edge, thus ensuring that IoT devices can respond quickly to local events, interact with local resources, operate with intermittent connections, and minimize the cost of transmitting IoT data to the cloud. In addition to supporting field protocols (MQTT/OPC/Modbus) for sensor/device data acquisition, the EIS-D210 can be used with the Advantech IoT SDK for wireless sensor (Wi-Fi, Bluetooth, LoRa) data integration. Furthermore, the EIS-D210 comes pre-integrated with Advantech's DeviceOn/iEdge software solution, allowing users to incorporate sensor data aggregation, edge analytics, and cloud applications for fast and easy real-time operational intelligence. EIS-D210 provides a range of connectivity options with excellent data handling and networking connection capabilities for various IoT applications.

Solution Block Diagram

IoT Connectivity



Industrial Protocol Connectivity

Provides standard protocols (Modbus/ OPC/ MQTT) for sensor and devices data collection.



Edge IoT Application Development

Open Plug-in SDK and sample code for sensor and data collection and conversion.



I/O and Sensor Compatibility

Integration tested with Advantech M2.COM, ADAM and WISE-4000 series.

Edge Intelligence



Edge Dashboard

Real time equipment dashboard on the edge site.



Edge Data Pre-processing

Provide edge data mix calculation to save server workload



Logic Rule Engine

Pre-integrated Data Flow Logic Designer Node-RED for flow control

Operation Management



Device Management

- Automatic device registration
- One-key to dashboard
- Device security



Monitoring & Control

- Real-time operations
- Power on/off
- Remote control



Update Management

- Batch provisioning
- Firmware updates
- Software updates

Cloud Integration

Microsoft Azure Cloud Services

Pre-configured with Azure Kubernetes services to quickly integrate with other cloud modules and shorten development effort.

Microsoft Azure

Cloud Connectivity

Azure IoT Edge / Plug and play certification and AWS Greengrass certification



Edge Cloud

Edge Cloud (EIS-S230) provides a scalable data management platform with Kubernetes open standard environment


IoT Development Tools

Node-RED Utility	Pre- integrated logic edit tool Node-RED
Data Collection	Receive Data to Agent and transfer to WISE-PaaS/RMM server
Data Conversion	Conversion data protocol to MQTT with JSON format
Plug-in SDK	Agent and protocol conversion plug-in SDK for developer
GUI Protocol Config Tool (for Modbus)	Provide Modbus GUI for quick configuration
Back-up and System Recovery	Acronis Hot back-up/ Recovery/ Hot-Key recovery
Security	McAfee white list protection
Remote Update (OTA)	Software(Advantech & 3rd party) update
Zero Downtime	Reserve edge data when lost connection and recover it when the connection is back
Light Analytic	Statistics and graphical representation of historical data
Dashboard Builder	Customizable dashboard to display sensor data with text, spark line, gauge, etc. types of widgets

**Support depends on device type, OS and account permission.

Dimensions

Unit: mm

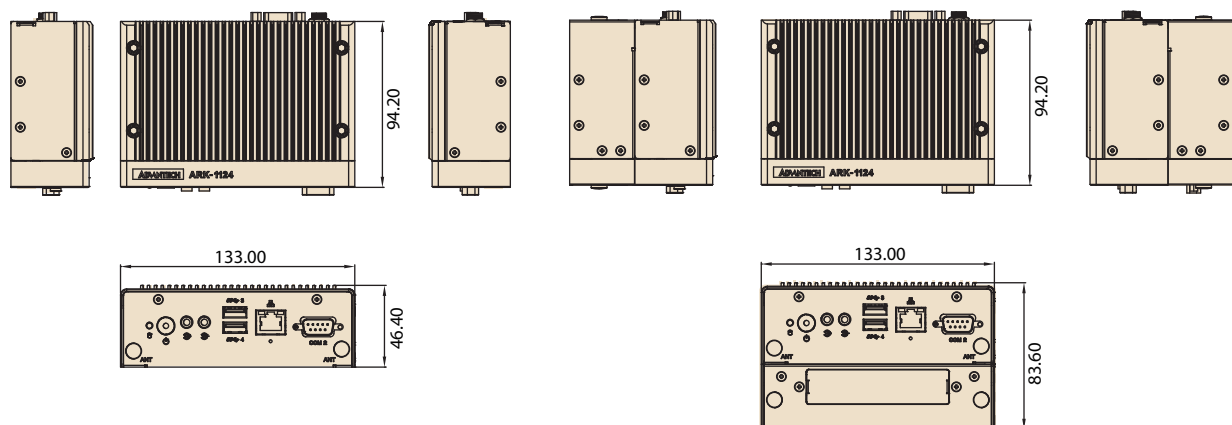

Specifications

Processor System	CPU	Intel® Celeron® N3350 Dual Core SoC
	Frequency	1.1GHz, turbo burst 2.4 GHz
	L2 Cache	2 MB
	BIOS	AMI EFI 64 bit
Memory	Technology	DDR3L 1866 MHz
	Max. Capacity	8 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel® HD Graphics 500
	Graphic Engine	4K Codec Decode& Encode for H.264, MPEG2, MVC, VC-1, WMV9, H.265 / HEVC, VP8, JPEG / MJPEG
	VGA	Up to 2048 x 1280 @ 60Hz
Ethernet	LAN1	10/100/1000 Mbps Intel i210 GbE, support Wake On Lan
	LAN2	10/100/1000 Mbps Intel i210 GbE, support Wake On Lan
Audio	Interface	Realtek ALC888S, High Definition Audio. Line-out, Line-in
IO Interface	Serial Ports	2 x RS-232/422/485 port with auto flow control
	USB Interface	4 x USB 3.0
Other	Watchdog timer	255 levels timer interval, setup by software
	TPM	Infineon SLB9665XQ 2.0
Expansion	Mini PCIe	1 x full-size mPCIe for WLAN/WWAN with SIM holder
	M.2	1 x M.2 E-key for WIFI (by CTOS or T-PN)
	iDoor	1, optional (2nd layer)
Storage	HDD/SSD	Supports 1 x SATA III Drive Bay (Compatible with 9.5mm height)
Software Support	Microsoft Windows	Win 10 IoT Enterprise LTSC
	Linux	Support by project
Power Requirement	Power Type	AT/ATX
	Power Input Voltage	12V _{DC} (Optional 12~24V power module)
	Minimum Power Input	12 V, 5 A
	Power Adapter	AC to DC, DC12 V/5 A, 60 W with lockable DC Jack
Power Consumption	Typical	5W
	Max.	15.73W
Mechanical	Construction	Aluminum housing
	Mounting	DIN-Rail/Wall/VESA Mounting Kits (Optional)
	Dimensions (W x H x D)	133 x 46.4 x 94.2mm (5.24" x 1.83" x 3.71")
	Weight	0.7 Kg (1.55lb)
Environment	Operating Temperature	With extended temperature peripherals: -20 ~ 60 °C (-4 ~ 140 °F) with 0.7m/s air flow With 2.5-inch hard disk 0 ~ 40 °C (32 ~ 104 °F) with 0.7m/s air flow
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185 °F)
	Relative Humidity	95% @ 40 °C (non-condensing)
	Vibration During Operation	With SSD: 3 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis With HDD: 0.5Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock During Operation	With SSD: 30 G, IEC 60068-2-27, half sine, 11 ms duration With HDD: 10G, IEC 60068-2-27, half sine, 11 ms duration
	EMC	CE/FCC Class B, CCC, BSMI
	Safety Certifications	UL, CB, CCC, BSMI

Ordering Information

Part Number	CPU	Memory	Storage	OS	Display	GbE	USB 3.0	RS-232/422/485	Audio	RF Controller	Power Input	mSATA	Operating Temperature*
EIS-D210W-E1DS641	Intel N3350 Dual Core SoC	4 GB	64G 2.5" SATAIII SSD	Win 10 Ent	1 x VGA	2	4	2	Line in Line out	Atheros QCA6174A	12 V _{DC}	1	-20 ~ 60° C
EIS-D210-01D0002	Intel N3350 Dual Core SoC	Option	Option	Option	1 x VGA	2	4	2	Line in Line out	Option	12 V _{DC}	1	-20 ~ 60° C

* If industrial grade memory and SSD selected.

Packing List

Item	Description
1	EIS-D210 Edge Computer
2	WISE-PaaS software packages
3	12V/60W AC to DC Adaptor
4	Accessory Package

Optional Items

Part Number	Description
1702002600	Power cable 3-pin 183cm, USA type
1702002605	Power cable 3-pin 183cm, EU type
1702031801	Power cable 3-pin 183cm, UK type
1700000237	Power cable 3-pin 183cm, PSE type

Embedded OS

Part Number	Description
20706U20DS0023	Ubuntu Desktop 20.04 LTS 64bit for EIS-D210